

SYSTEM SCHEMATICS

A600

APRIL, 1992

PN-400422-02



Produced By:

**Commodore International Spare Parts GmbH
Braunschweig, West Germany**

SYSTEM SCHEMATICS

A600

APRIL, 1992

PN-400422-02

INTERNATIONAL EDITION

COMMODORE "INTERNATIONAL EDITION" SERVICE MANUALS CONTAIN PART NUMBER INFORMATION WHICH MAY VARY ACCORDING TO COUNTRY. SOME PARTS MAY NOT BE AVAILABLE IN ALL COUNTRIES.

Commodore Business Machines, Inc.

1200 Wilson Drive, West Chester, Pennsylvania 19380 U.S.A.

Commodore makes no express or implied warranties with regard to the information contained herein. The information is made available solely on an as is basis, and the entire risk as to completeness, reliability, and accuracy is with the user. Commodore shall not be liable for any damages in connection with the use of the information contained herein. The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty as to quality or suitability of such replacement part. Reproduction or use without express permission, of editorial or pictorial content, in any matter is prohibited.

This manual contains copyrighted and proprietary information. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Commodore Electronics Limited.

Copyright © 1992 by Commodore Electronics Limited.
All rights reserved. Printed in U.S.A.

TABLE OF CONTENTS

SECTION 1 — SPECIFICATIONS

SPECIFICATIONS 1-1

SECTION 4 — PARTS

BOARD LAYOUT 4-1
SHIPPING ASSEMBLY 4-2
MAIN ASSEMBLY 4-3
SHIPPING ASSEMBLIES 4-4
MAJOR ASSEMBLIES 4-5
PCB COMPONENTS 4-6

SECTION 5 — SCHEMATICS

SCHEMATIC #315987, REV. C 5-1

SPECIFICATIONS

INTRODUCTION

The A600 is a feature enhanced version of the A500 personal computer, in a smaller case with no numeric keypad.

FEATURES

CPU:	7.16MHz 68000 NTSC 7.09 MHz 68000 PAL
MEMORY:	512KB or 1MB internal expandable with additional 1MB external (A601)
KICKSTART ROM:	512K (V2.XX)
MASS STORAGE MEMORY:	Internal, 3.5 inch FDD mounted on the right side. The A600 HD will contain a 2.5" IDE HDD.
ADDITIONAL FEATURES:	PCMCIA/JEIDA Standard, Memory and I/O card interface. IDE Hard Drive Interface (2.5" form factor) Color Composite Video output RF Audio/Video Output

NEW ADDITIONS

- 1) 8375 FAT AGNUS which supports 2 Meg. of Chip RAM
- 2) 8373 ECS Denise
- 3) Full ECS support
- 4) V2.XX in ROM
- 5) Memory and I/O card interface
- 6) IDE Hard Drive Interface (2.5")
- 7) Color Composite Video Output
- 8) RF Video/Audio Output

CUSTOM CHIPS

The A600 custom chip set has been repackaged in PLCC form for surface mounting application. The A600 will use the 8375 2MB Fat Agnus, the 8373 ECS Denise and the 8364R7 Paula Chip which remains functionally unchanged. Lastly, the A600 will use an enhanced version of the 5719 Gary chip called Gayle, which supports the memory, I/O card interface and the IDE Hard Drive interface.

EXTERNAL SYSTEM I/O


External floppy, Serial, Parallel, Mouse, Joystick, Stereo Audio Ports — these Ports remain unchanged from their A500 counterparts.

**PC CARD
PCMCIA SIGNAL DESCRIPTIONS**

No.	Ver. 3	No.	Ver. 3
1	GND	35	GND
2	D3	36	CD1
3	D4	37	D11
4	D5	38	D12
5	D6	39	D13
6	D7	40	D14
7	CE1	41	D15
8	A10	42	CE2
9	OE	43	(RFSH)
10	A11	44	(OP1)
11	A9	45	(OP2)
12	A8	46	A17
13	A13	47	A18
14	A14	48	A19
15	WE/PGM	49	A20
16	(RDY/BSY)	50	A21
17	VCC	51	VCC
18	VPP1	52	VPP2
19	A16	53	A22
20	A15	54	A23
21	A12	55	RFU
22	A7	56	RFU
23	A6	57	RFU
24	A5	58	RFU
25	A4	59	RFU
26	A3	60	RFU
27	A2	61	(REG)
28	A1	62	OP3
29	A0	63	BVD1
30	D0	64	D8
31	D1	65	D9
32	D2	66	D10
33	WP	67	CD2
34	GND	68	GND

IDE SIGNAL DESCRIPTIONS

Pin	Signal	Pin	Signal
1	- Host reset	2	Ground
3	+ Host data 7	4	+ Host data 8
5	+ Host data 6	6	+ Host data 9
7	+ Host data 5	8	+ Host data 10
9	+ Host data 4	10	+ Host data 11
11	+ Host data 3	12	+ Host data 12
13	+ Host data 2	14	+ Host data 13
15	+ Host data 1	16	+ Host data 14
17	+ Host data 0	18	+ Host data 15
19	Ground	20	Key
21	Reserved	22	Ground
23	- Host Low	24	Ground
25	- Host IOR	26	Ground
27	Reserved	28	+ Host ALE
29	Reserved	30	Ground
31	+ Host IRQ 14	32	- Host IO 16
33	+ Host Addr 1	34	- Host PIAG
35	+ Host Addr 0	36	+ Host Addr 2
37	- Host CS 0	38	- Host CS 1
39	- Host SLV/ACT	40	Ground

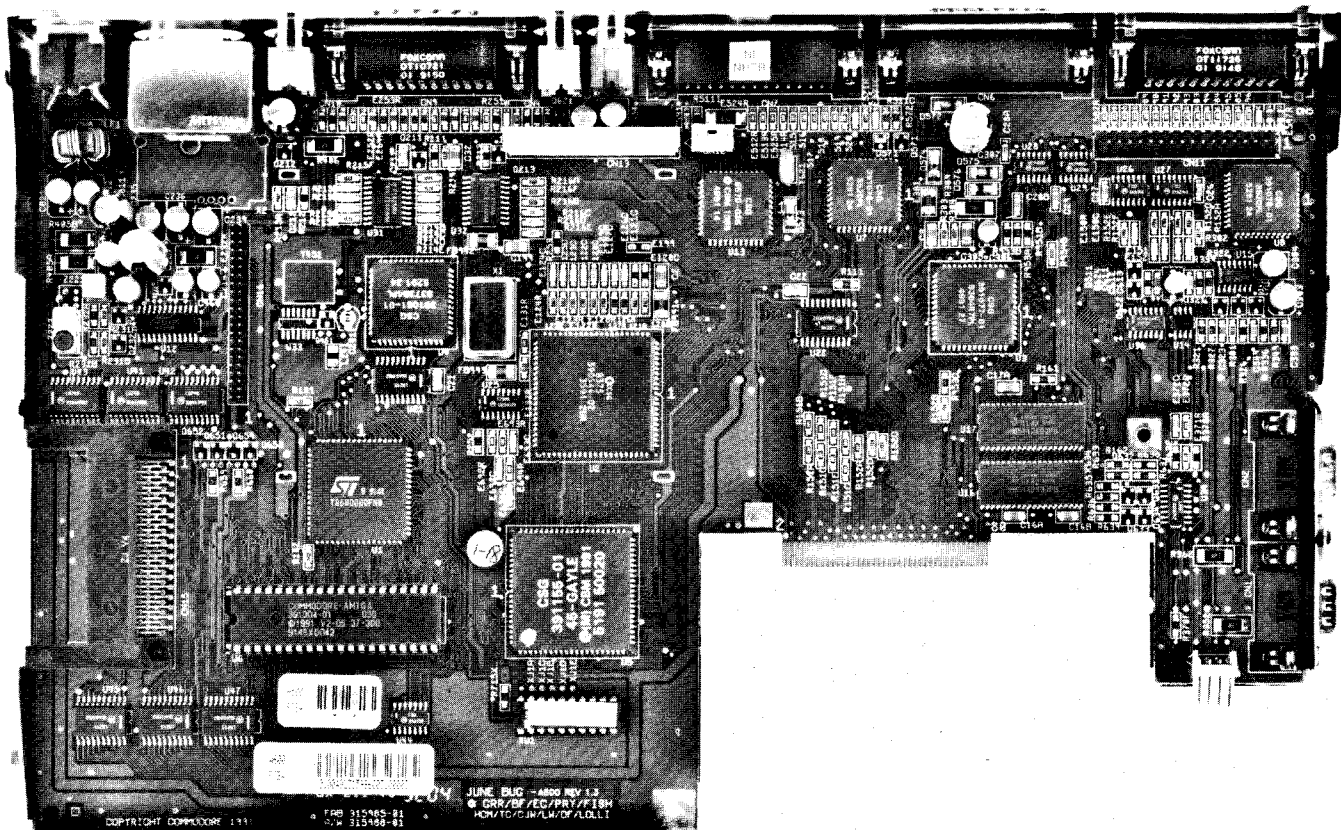


KEY COMPONENTS

Ref.	Chip	Description	Part Number
U1	68000	68000 Processor 8MHz	390084-01
U2	8375	ECS Agnus A300/A500+	390544-01
U3	8364	Paula	391077-01
U4	8373	ECS Denise	391081-01
U5	4145-20	Gayle Gate Array	391155-01
U6	ASST	ROM 256Kx16, 200ns	391304-01
U7-8	8520	Amiga VIA. 1 MHz	391078-01
U10-11	28F10	Flash Memory 128Kx8	
U12	CXA1145	Sony Video Encoder	391084-01
U13	6570-30	Amiga Keyboard MPU	391079-01
U14	NE555	Reset Timer	391104-01
U16-17	ASST	Dram 256Kx16, 120ns	391105-01
U15	LF347	Bimos Op-Amp	391103-01
	TL084	Bimos Op-Amp	391103-01
U28	1488	EIA Line Driver	391087-01
U29	1489	EIA Line Receiver	391086-01
X1	OSC	TTL 28.63636 MHz NTSC	325566-14
	OSC	TTL 28.37512 MHz PAL	252344-01
Y451	XTAL	4.43619 MHz PAL Burst	252345-01
Y621	XTAL	3 MHz Ceramic Resonator	391156-01
X2	ASST	PAL Video Modulator	313371-05
	ASST	NTSC Video Modulator	313371-01


CONNECTORS

Ref.	Type	Description	Part Number
CN1	DB9P	Mouse/Joystick 1	390242-01
CN2	DB9P	Mouse/Joystick 2	390242-01
CN3	RCA-J	Right Audio Output	252122-02
CN4	RCA-J	Left Audio Output	252122-01
CN5	DB23S	External Floppy	390241-03
CN6	DB25P	RS232 Serial Port	
CN7	DB25S	Parallel Printer Port	390241-05
CN8	SQ DIN	Power Supply Connector	252167-01
CN9	DB23P	Video Output	390242-03
CN10	RCA-J	Composite Video	252122-01
CN11	DIL-34	Internal Floppy Signal	903345-17
CN12	SIL-4	Internal Floppy Power	325516-04
CN13	MEM-30	Keyboard Membrane	390492-02
CN14	SIL-4	Internal Floppy Power	
CN13	MEM-30	Keyboard Membrane	
CN14	SIL-4	Keyboard Status LED's	391314-01
CN15	PCMCIA	PC "Memory Card"	391073-01
P9	EDGE-80	Memory Bus Expansion	

Shipping Assembly

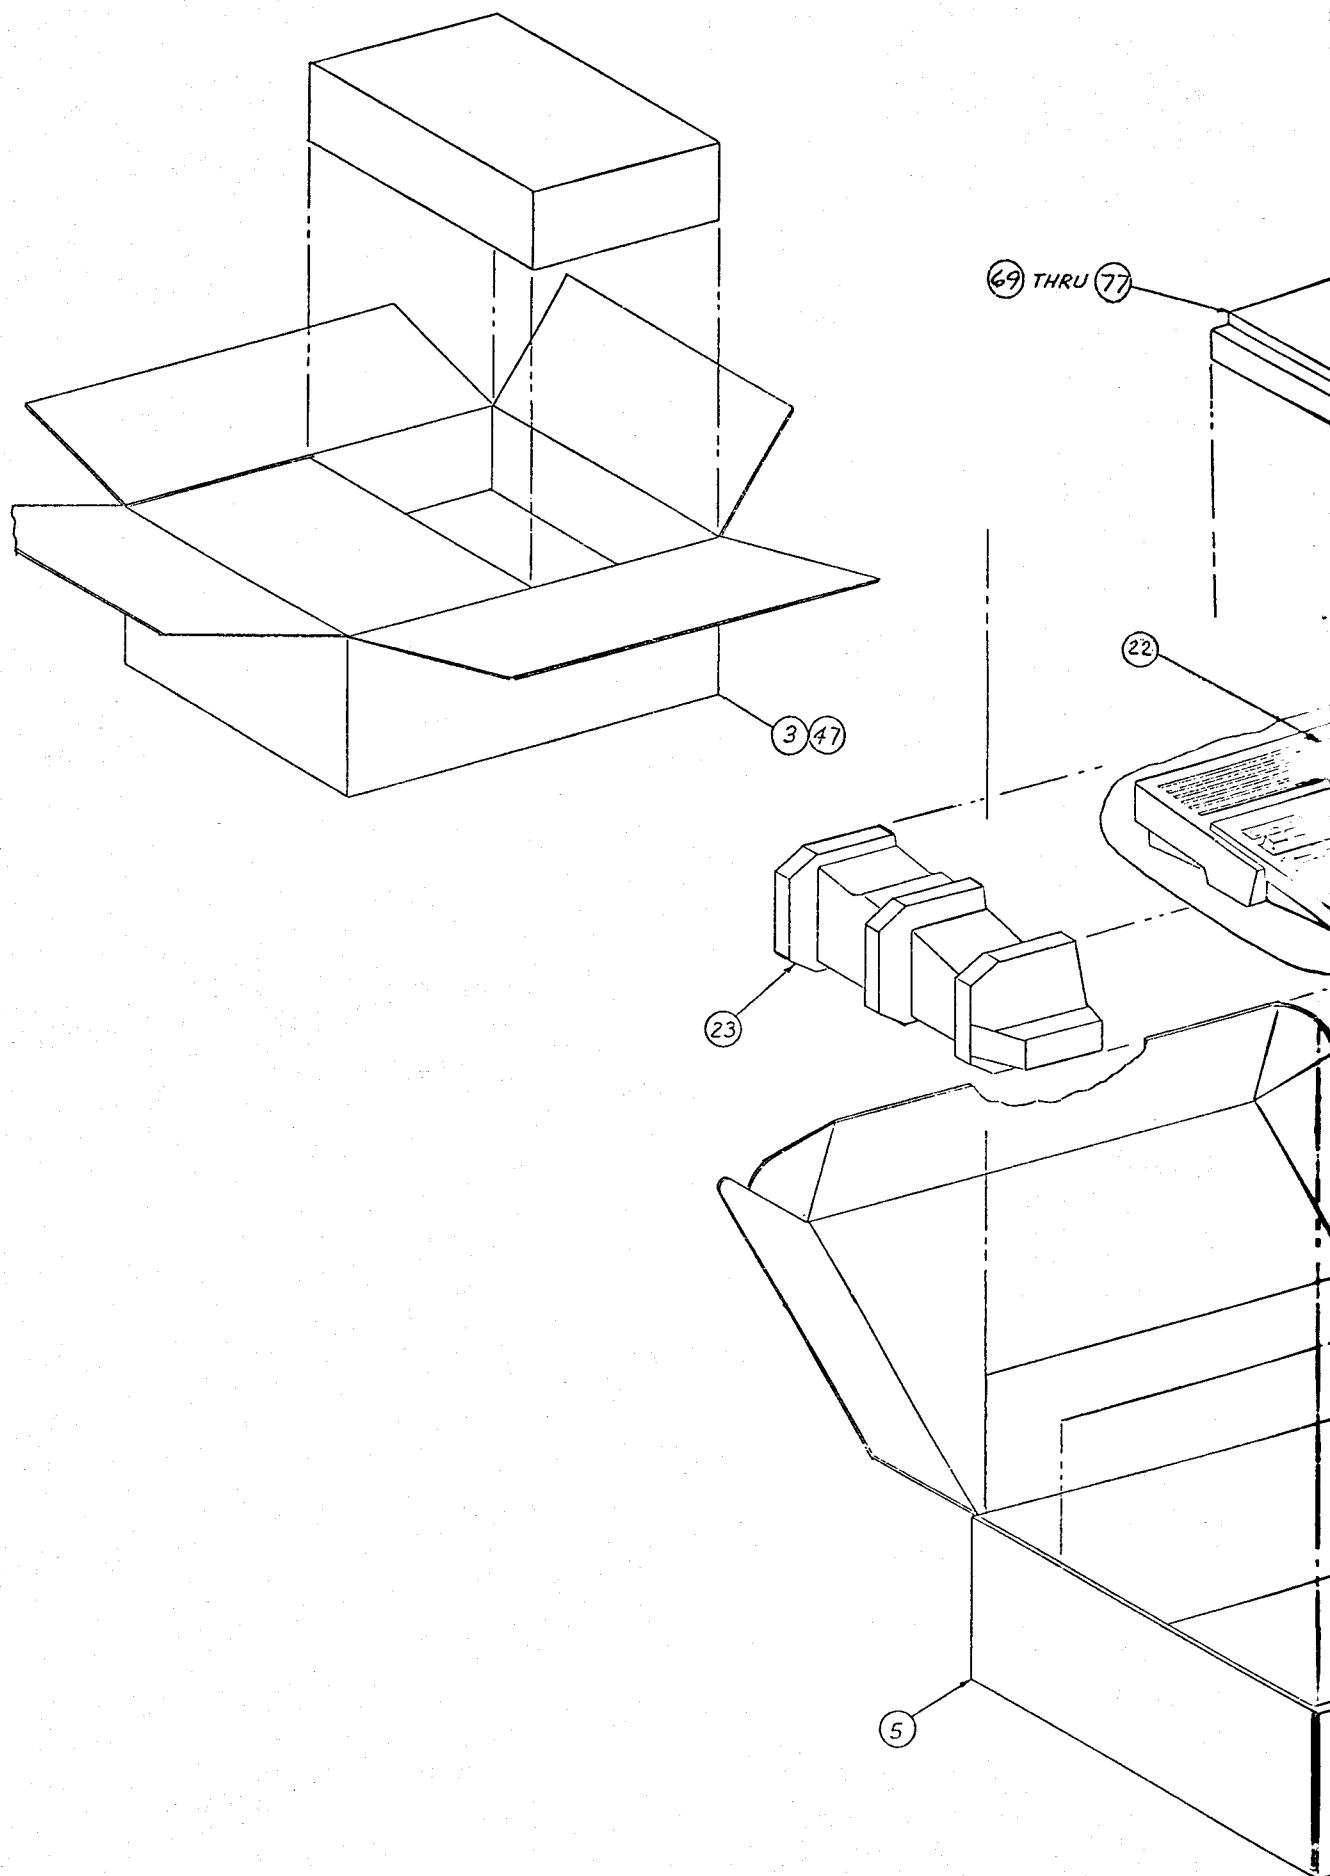


A600 SYSTEM SCHEMATICS


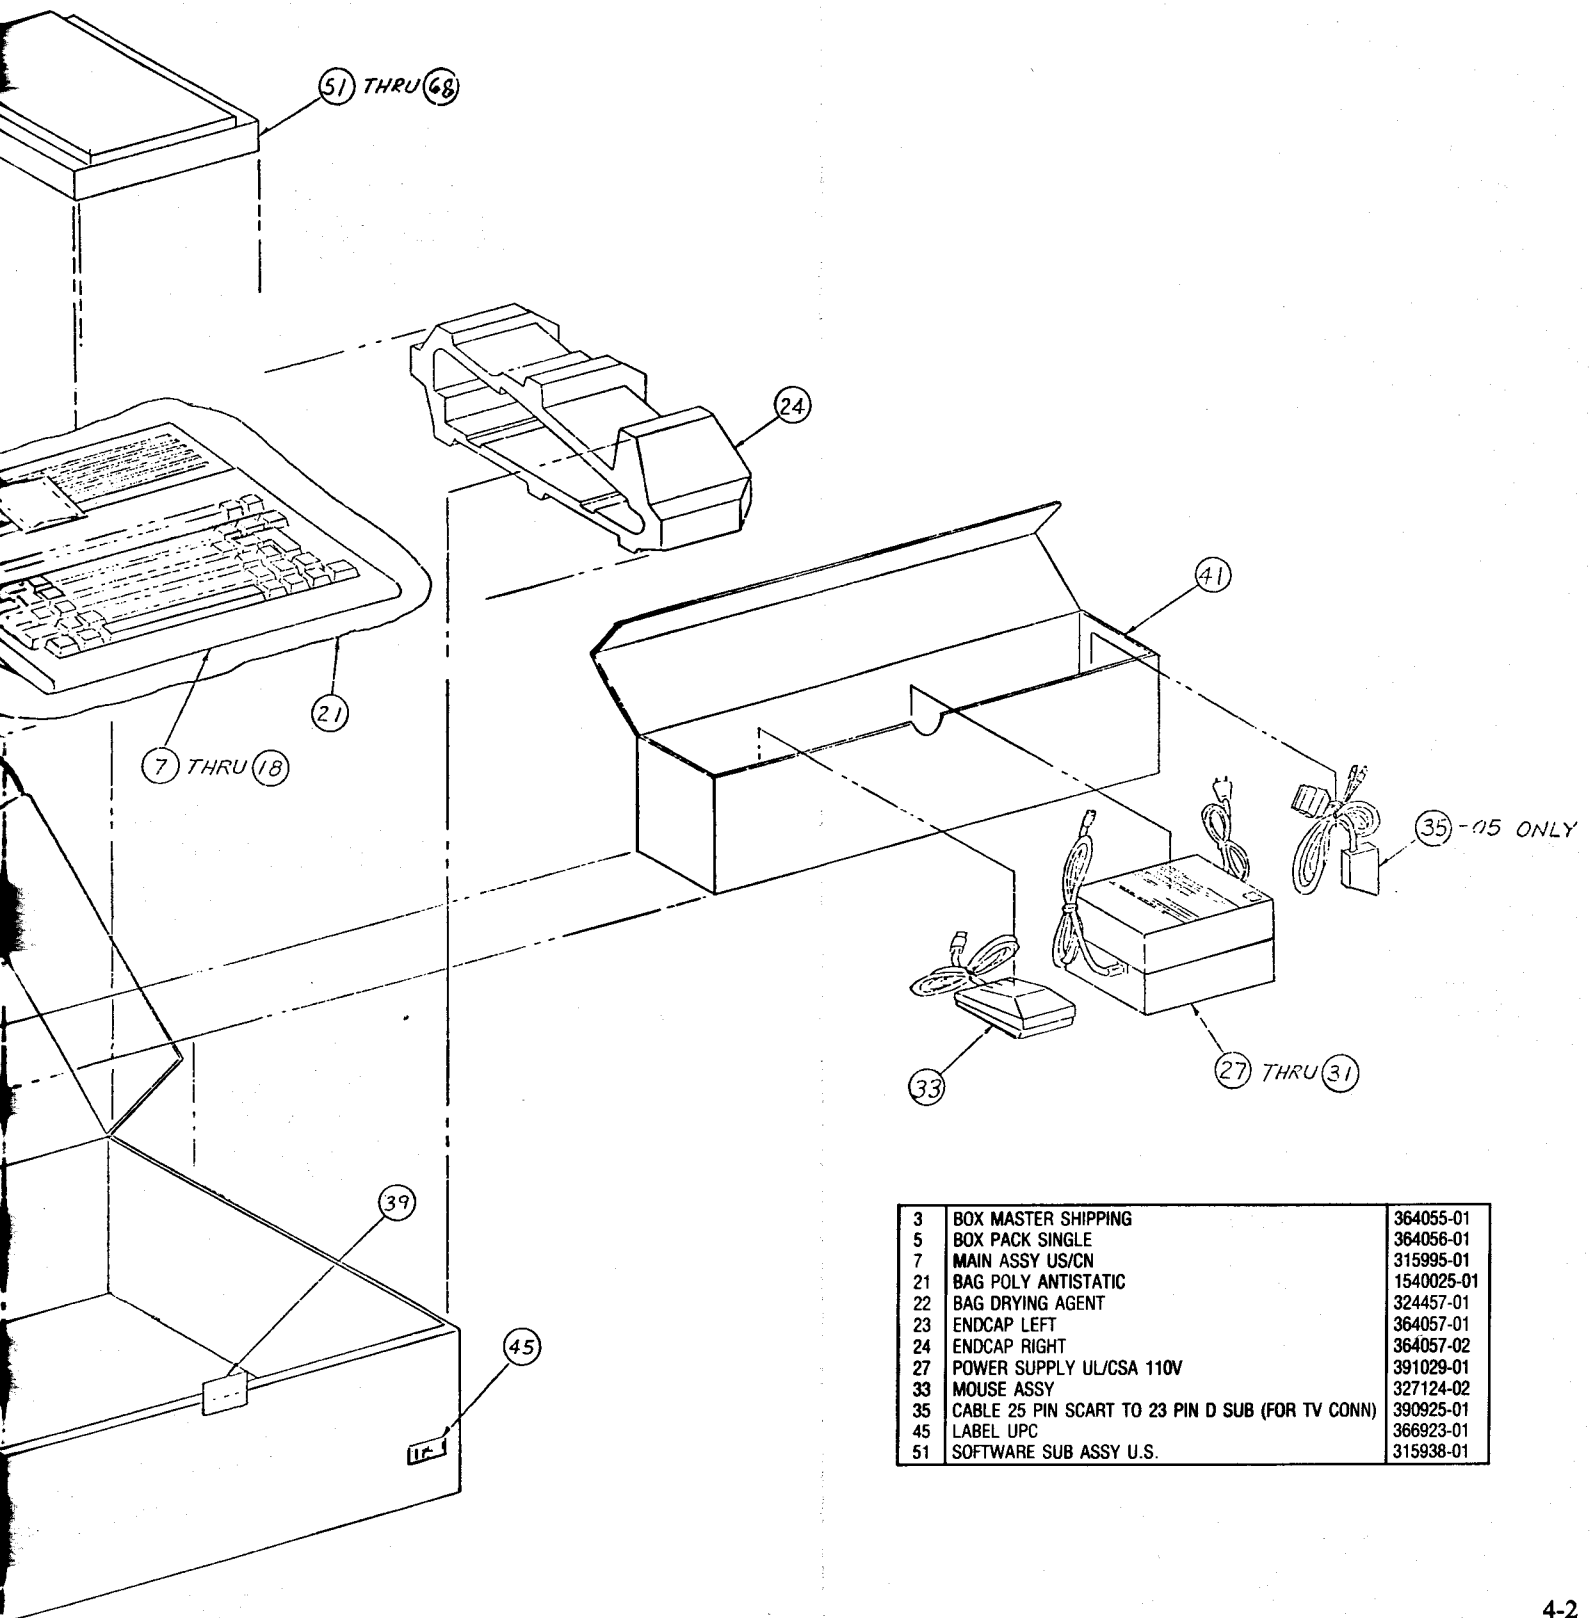


3	BOX MASTER SHIPPING	364055-01
5	BOX PACK SINGLE	364056-01
7	MAIN ASSY US/CN	315995-01
21	BAG POLY ANTISTATIC	1540025-01
22	BAG DRYING AGENT	324457-01
23	ENDCAP LEFT	364057-01
24	ENDCAP RIGHT	364057-02
27	POWER SUPPLY UL/CSA 110V	391029-01
33	MOUSE ASSY	327124-02
35	CABLE 25 PIN SCART TO 23 PIN D SUB (FOR TV CONN)	390925-01
45	LABEL UPC	366923-01
51	SOFTWARE SUB ASSY U.S.	315938-01


Main Assembly

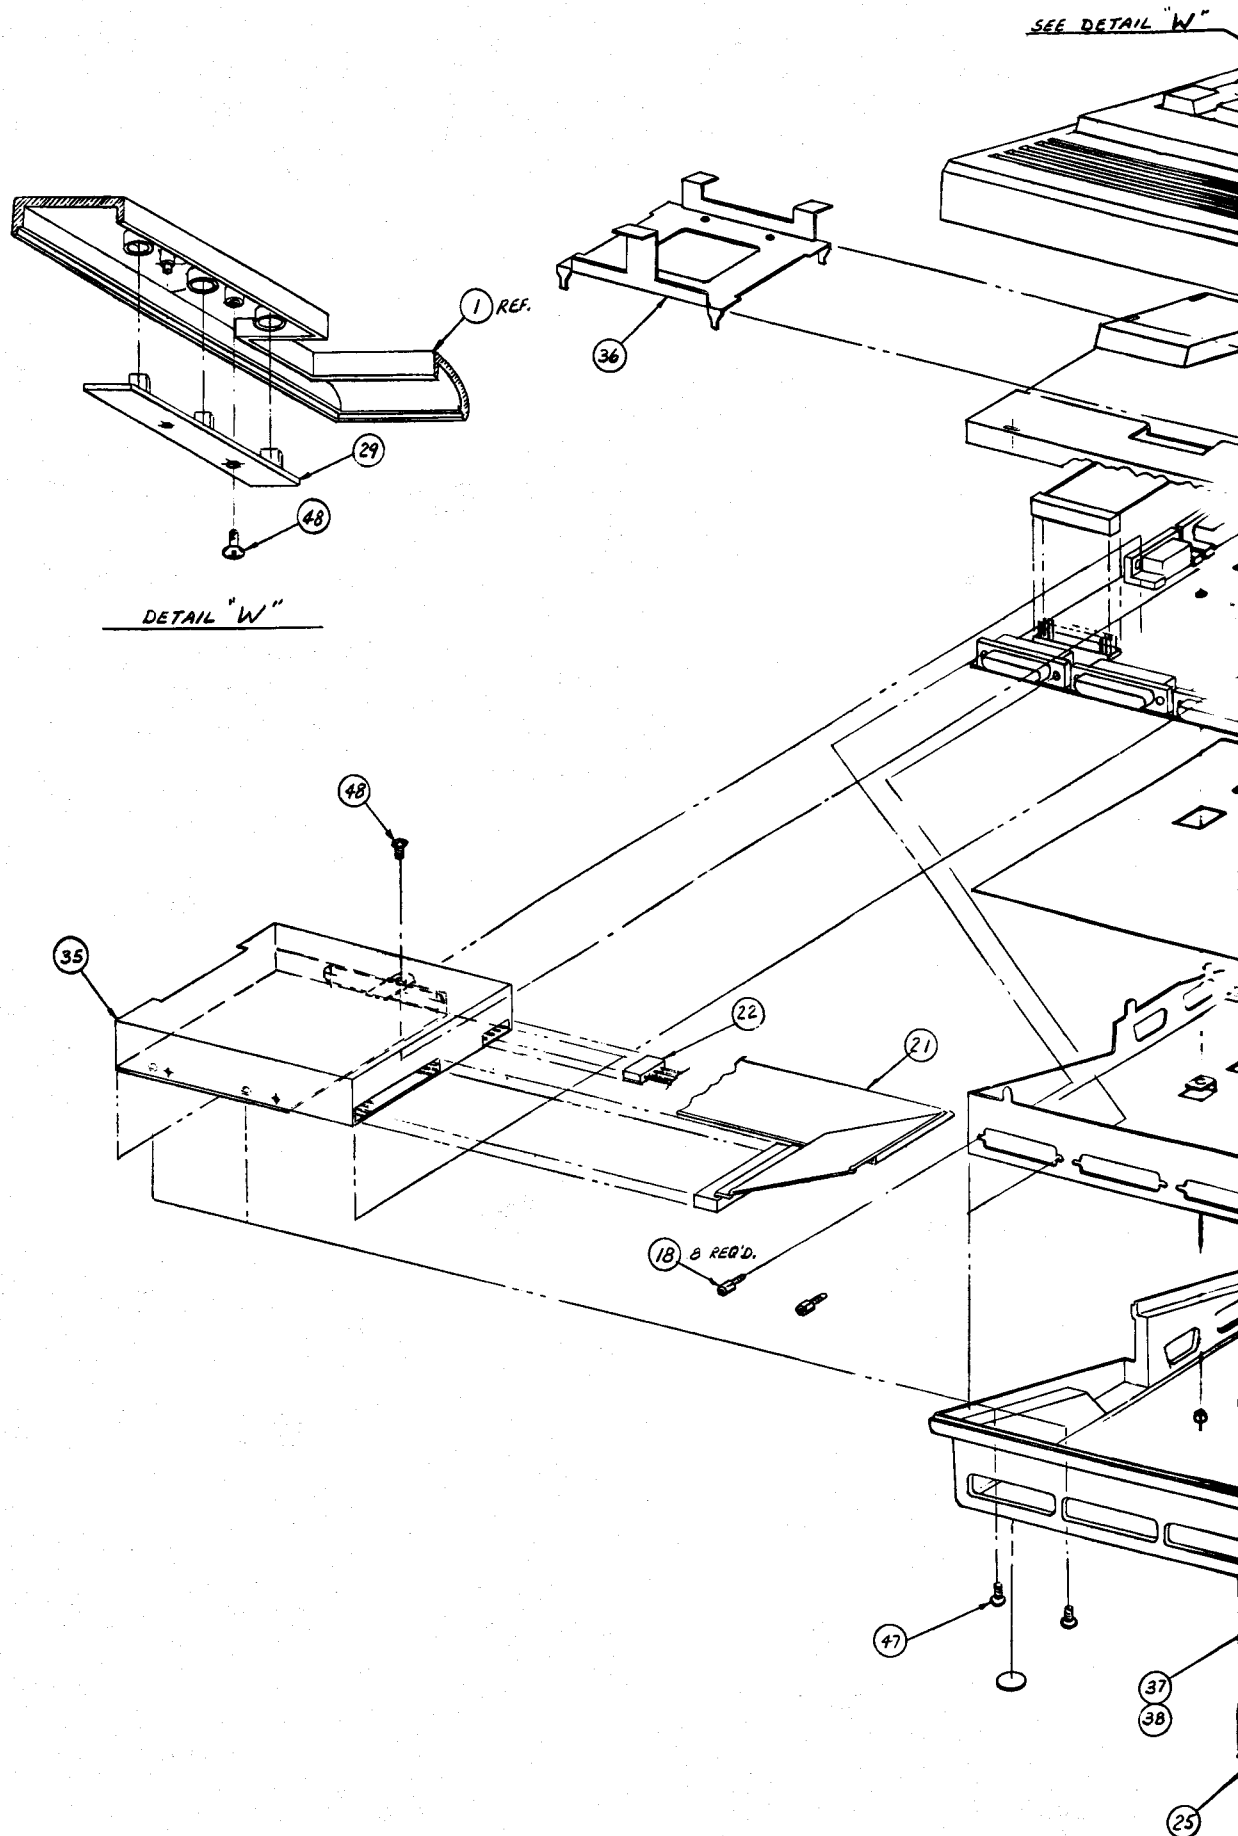


A600 SYSTEM SCHEMATICS

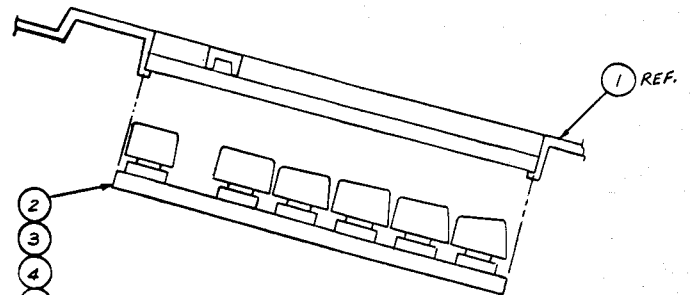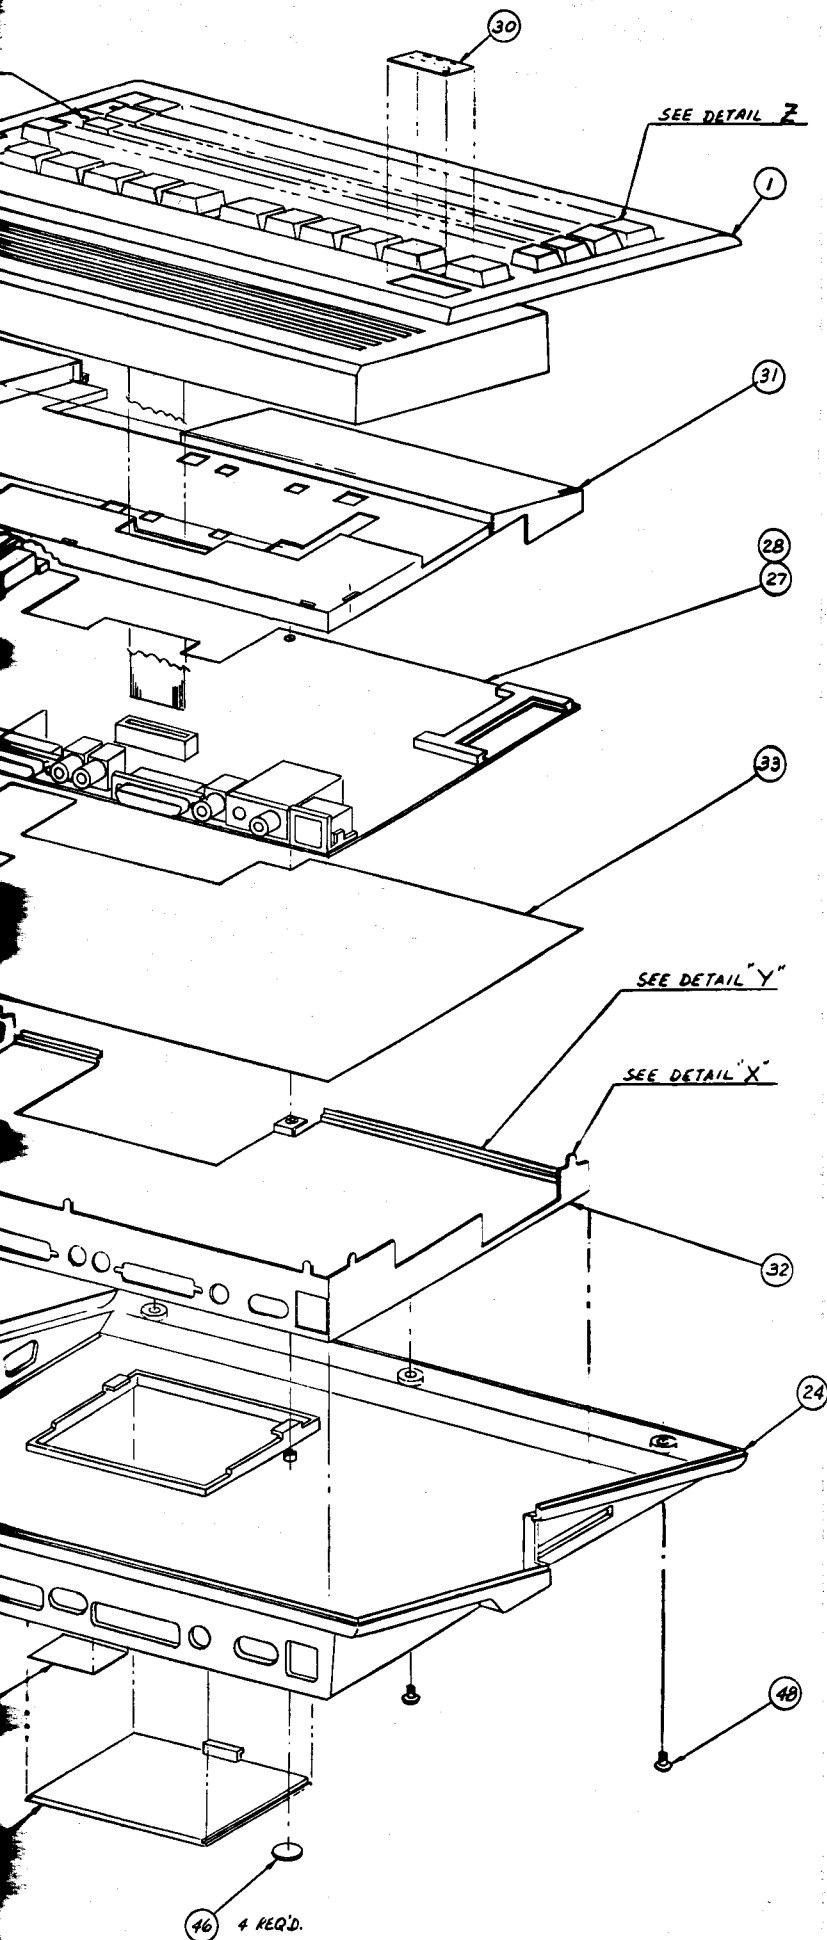

DETAIL "Z"

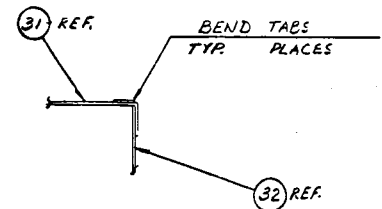

DETAIL "X"



1	TOP CASE	363786-01
18	JACKPOST STANDOFF (QTY 8)	390251-01
21	CABLE ASSY FLOPPY DISK DRIVE	364423-01
22	HARNESS DISK POWER ASSY	327207-02
24	BOTTOM CASE	363787-01
25	RAM DOOR	363899-01
27	PCB ASSY NTSC	315986-01
28	PCB ASSY PAL	315986-02
29	LED ASSY	315992-01
30	NAMEPLATE A600	363951-01
31	TOP SHIELD	363788-01
32	BOTTOM SHIELD	363789-01
33	INSULATION SHEET	363790-01
34	BRACKET SUPPORT FDD	363795-01
35	DRIVE FLOPPY DISK 3.5"	363914-01
36	SUPPORT HARD DISK DRIVE	363969-01
37	LABEL RATING & SERIAL PAL	366800-01
38	LABEL RATING & SERIAL NTSC	366800-02
46	FEET RUBBER WHITE (QTY 4)	950150-01
47	SCREW 3M X 6.0MM MACH PHL PH (QTY 4)	906800-05
	FASTEN FDD TO BOTTOM CASE	

Commodore International Spare Parts List SHIPPING ASSEMBLIES

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries. Part Numbers are subject to change.

A600 SHIPPING ASSY		A600 SHIPPING ASSY (Continued)	
530300-01	U.S.	391029-02	POWER SUPPLY BSI 240V
530300-02	CN	391029-03	POWER SUPPLY VDE 220V
530300-03	U.K.	391029-04	POWER SUPPLY SEV 220V
530300-04	GR	391029-05	POWER SUPPLY SAA 220V
530300-05	FR	327124-02	MOUSE ASSY
530300-06	IT	390925-01	CABLE 25 PIN SCART TO 23 PIN D SUB (FOR TV CONN)
530300-07	SP	364346-01	BOX ACCESSORY
530300-08	SG	364342-01	SPACER CARDBOARD
530300-09	SF	364342-02	SPACER CARDBOARD
530300-10	AU NOT USED	318143-02	GLUE WHITE
530300-11	NR	366923-01	LABEL UPC
530300-12	SD	368084-01	SEAL TAMPER EVIDENT (2 ON SINGLE PACK BOX FLAPS)
530300-13	FN	999104-01	TAPE ADHESIVE TRANSPARENT 50MM
530300-14	NE	315938-01	SOFTWARE SUB ASSY U.S.
530300-15	DN	315938-02	SOFTWARE SUB ASSY CN
530300-16	BF	315938-03	SOFTWARE SUB ASSY UK
530300-17	BD	315938-04	SOFTWARE SUB ASSY GR
530300-18	AL	315938-05	SOFTWARE SUB ASSY FR
530300-19	CEL	315938-06	SOFTWARE SUB ASSY IT
530300-20	PG	315938-07	SOFTWARE SUB ASSY SP
364055-01	BOX MASTER SHIPPING	315938-08	SOFTWARE SUB ASSY SG
364056-01	BOX PACK SINGLE	315938-09	SOFTWARE SUB ASSY SF
315995-01	MAIN ASSY US/CN	315938-10	SOFTWARE SUB ASSY NR
315995-02	MAIN ASSY GR/AU	315938-11	SOFTWARE SUB ASSY SD
315995-03	MAIN ASSY FR/BE	315938-12	SOFTWARE SUB ASSY FN
315995-04	MAIN ASSY SD/FN	315938-13	SOFTWARE SUB ASSY NE
315995-05	MAIN ASSY SP	315938-14	SOFTWARE SUB ASSY DN
315995-06	MAIN ASSY DN	315938-15	SOFTWARE SUB ASSY BF
315995-07	MAIN ASSY SEV	315938-16	SOFTWARE SUB ASSY AL
315995-08	MAIN ASSY NR	368435-01	MANUAL INTRODUCING THE A600 ENGLISH
315995-09	MAIN ASSY NE	368436-01	MANUAL INTRODUCING THE A600 GERMAN
315995-10	MAIN ASSY UK/AL	368437-01	MANUAL INTRODUCING THE A600 FRENCH
315995-11	MAIN ASSY IT	368438-01	MANUAL INTRODUCING THE A600 ITALIAN
315995-12	MAIN ASSY PG	368439-01	MANUAL INTRODUCING THE A600 SPANISH
1540025-01	BAG POLY ANTISTATIC	368440-01	MANUAL INTRODUCING THE A600 NORWEGIAN
324457-01	BAG DRYING AGENT	368441-01	MANUAL INTRODUCING THE A600 SWEDISH
364057-01	ENDCAP LEFT	368443-01	MANUAL INTRODUCING THE A600 DUTCH
364057-02	ENDCAP RIGHT	368444-01	MANUAL INTRODUCING THE A600 DANISH
391029-01	POWER SUPPLY UL/CSA 110V		

Commodore International Spare Parts List

A600 MAJOR ASSEMBLIES

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries.

315995-01	MAIN ASSY US/CN	315986-02	PCB ASSY PAL
315995-02	MAIN ASSY GR/AU	315986-03	PCB NTSC 1M
315995-03	MAIN ASSY FR/BE	315992-01	LED ASSY
315995-04	MAIN ASSY SD/FN	363951-01	NAMEPLATE A600
315995-05	MAIN ASSY SP	363788-01	TOP SHIELD
315995-06	MAIN ASSY DN	363789-01	BOTTOM SHIELD
315995-07	MAIN ASSY SEV	363790-01	INSULATION SHEET
315995-08	MAIN ASSY NR	363795-01	BRACKET SUPPORT FDD
315995-09	MAIN ASSY NE	363914-01	DRIVE FLOPPY DISK 3.5"
315995-10	MAIN ASSY UK/AL	363969-01	SUPPORT HARD DISK DRIVE
315995-11	MAIN ASSY IT	366800-01	LABEL RATING & SERIAL PAL
315995-12	MAIN ASSY PG	366800-02	LABEL RATING & SERIAL NTSC
363786-01	TOP CASE	366800-03	LABEL RATING & SERIAL PAL (SUBSTITUTE)
363756-01	KEYBOARD ASSY US/CN	366800-04	LABEL RATING & SERIAL NTSC (SUB)
363756-04	KEYBOARD ASSY GERMAN	366800-05	LABEL RATING & SERIAL PAL (SUB)
363756-05	KEYBOARD ASSY FRENCH	366800-06	LABEL RATING & SERIAL NTSC (SUB)
363756-12	KEYBOARD ASSY SWEDISH/FINNISH	366800-07	LABEL RATING & SERIAL PAL (SUB)
363756-07	KEYBOARD ASSY FINNISH	366800-08	LABEL RATING & SERIAL NTSC (SUB)
363756-15	KEYBOARD ASSY DANISH	950150-01	FEET RUBBER WHITE (QTY 4)
363756-08	KEYBOARD ASSY SWISS	906800-05	SCREW 3M X 6.0MM MACH PHL PH (QTY 4) FASTEN FDD TO BOTTOM CASE
363756-11	KEYBOARD ASSY NORWEGIAN	906883-01	SCREW 3M X 6.0MM SELF TAPPING (QTY 4) FASTEN PCB, FDD BKT TO BOTTOM CASE
363756-03	KEYBOARD ASSY UK/AUSTRALIA	364075-01	SCHEMATIC
363756-06	KEYBOARD ASSY ITALIAN	391033-02	LED GREEN
363756-20	KEYBOARD ASSY PORTUGUESE	391033-01	LED YELLOW
363756-99	KEYBOARD ASSY BLANK	391315-01	CONNECTOR HOUSING 4 POSITION
390251-01	JACKPOST STANDOFF (QTY 8)	391316-01	PIN
390251-03	JACKPOST STANDOFF (SUB FOR 390251-01)	903756-10	WIRE AWG #24 BLACK 200MM LG.
324530-02	JACKPOST STANDOFF (SUB FOR 390251-01)	903756-02	WIRE AWG #24 RED 200MM LG.
363787-01	BOTTOM CASE	903756-03	WIRE AWG #24 ORANGE 200MM LG.
363899-01	RAM DOOR	903756-05	WIRE AWG #24 GREEN 200MM LG.
364423-01	CABLE ASSY FLOPPY DISK DRIVE		
327207-02	HARNESS DISK POWER ASSY		
315986-01	PCB ASSY NTSC		

A601 RAM EXPANSION

580300-01	512K	580300-02	1M
-----------	------	-----------	----

HARD DRIVE ACCESSORIES

368681-01	INTRO MANUAL	906600-01	SCREW (QTY 4)
368712-01	MANUAL USERS	367826-01	DISK INSTALL 204
312896-01	HDD ASSY	363951-02	NAMEPLATE A600HD
364435-01	CABLE HDD		

Commodore International Spare Parts List

PCB Components

PCB Assembly A600

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries.

IC COMPONENTS			RESISTORS — 1/8W 5% UNLESS OTHERWISE SPECIFIED (Continued)		
390084-01	CPU MC68000FN8 8MHZ 68PIN PLCC	U1	310026-12	SM 68 OHM (1206)	E131R,E132R,E251R,E252R,E257R,E261R,E262R,E266R,E267R,E351R,E353R-E358R,E361R,E363R-E368R,E371R-E374R,E511R-E523R,E525R,E551R-E556R,E558R,E581R-E596R,E692R-E694R,R151A-R151H,R152A
390544-02	8375R0 AGNUS HR NTSC 84 PIN PLCC	U2			R232E,R234A-R234D
390544-01	8375R0 AGNUS HR PAL 84PIN PLCC	U2	310026-29	SM 75 OHM (1206)	R237,R622,R639
391155-01	4145R0F020 GAYLE 84PIN PLCC	U5	310026-05	SM 100 OHM (1206)	R236,R714A,R714B
391081-01	8375R4 DENISE HR 52PIN PLCC	U4	310026-24	SM 120 OHM (1206)	R211-R213,R233A-R233C
391077-01	8364R7 PAULA 52PIN PLCC	U3	310026-13	SM 150 OHM (1206)	R214A,R215A,R216A
391079-01	6571R4 KEYBD UP 44PIN PLCC	U13	310026-40	SM 270 OHM (1206)	R214F,R215F,R216F
391078-01	8520R4 CIA 44PIN PLCC 1MHZ	U7,U8	310022-22	SM 330 OHM (1206)	R235,R321,R331
391144-01	74HCT244 SM	U31,U32	310026-14	SM 360 OHM (1206)	R325,R335
391139-01	74F00 SM	U26	310026-15	SM 390 OHM (1206)	R111,R161,R162,R515,R659,R660,R952,R953A-R953C
391140-01	74F27 SM	U36	310026-21	SM 470 OHM (1206)	R224
391141-01	74LS74A SM PAL	U33	310026-11	SM 820 OHM (1206)	R101,R102,R222,R223,R303,R304,R319,R324,R334,R511D,R103,R512,R621,R654,R954A,R954B,R231A-R231C,R238,R214B,R215B,R216B (R244)
391218-01	74F02 SM	U44	310026-07	SM 1K OHM (1206)	R221
391142-01	74LS245 SM	U21,U22,U41-U43,U45-U47			R214C,R215C,R216C
391085-01	74LS157 SM	U34	310026-25	SM 1.5K (1206)	R347,R571
391176-01	74F139 SM	U27	310026-32	SM 2K OHM (1206)	R251-R253,R348,R632,R634,R636,R655,R951A-R951F,R370A-R370H,R651,R719,R514,R715X (R241)
391099-01	74F258 SM	U25	310026-16	SM 2.7K OHM (1206)	R322,R323,R327,R329,R332,R333,R337,R339,R346,R511A-R511C,R511F,R511I,R637,R572,R623,R631,R633,R635,R652,R653,R656,R657,R715A-R715H,R716-R718 (R243)
390071-03	PAL 16L8B BLANK (WILL BE USED ONLY TEMPORARILY W/REV 0 GAYLE)		310026-08	SM 4.7K OHM (1206)	R345
391087-01	INTERFACE MC1488D SM	U28			R459
391086-01	INTERFACE MC1489D SM	U29	310026-17	SM 10K OHM (1206)	R232A-R232C,R349
391103-01	LINEAR LF347/TLO84ACD SM	U15			R612
391104-01	LINEAR NE555 SM	U14	310026-23	SM 22K OHM (1206)	R326,R336
391105-01	DRAM 256K X 16 80NS SM	U16,U17	310026-27	SM 27K OHM (1206)	R611
391304-01	ROM KICKSTART V2.0 40PIN DIP	U6	310026-18	SM 33K OHM (1206)	R301,R302
391084-01	VIDEO ENCODER CXA1145M SM	U12	310026-03	SM 47K OHM (1206)	(R242 FOR PAL)
CONNECTORS			310026-19	SM 470K OHM (1206)	(R245 FOR PAL)
390241-03	D SUB 23 PIN FEMALE DB23S	CN5 EXTERNAL FLOPPY	310026-20	SM 1M OHM (1206)	R246 NTSC
390242-03	D SUB 23 PIN MALE DB23P	CN9 RGB VIDEO	310026-09	SM 10 OHM (1206)	(R236 FOR PAL)
390241-05	D SUB 25 PIN FEMALE DB25S	CN7 PARALLEL PRINTER PORT	310026-35	SM 6.8K OHM (1206)	R214D,R215D,R216D
390242-01	D SUB 9 PIN MALE DB9P	CN1,CN2,MOUSE/JOY-STICK	310026-41	CHIP SM 1.8K (1206)	R214E,R215E,R216E
252122-01	RCA JACK YELLOW	CN10,COLOR COMPOSITE VIDEO			R214B,R215B,R216B
252122-01	RCA JACK WHITE	CN4 LEFT AUDIO	310026-42	CHIP SM 180 OHM (1206)	R214C,R215C,R216C
252122-02	RCA JACK BLACK	CN3 RIGHT AUDIO	391154-01	SM 4.02K OHM (1206) 1/8W 1%	R309,R405A,R405B
252167-01	DIN 5 PIN SQUARE	CN8 CPU POWER	391154-02	SM 8.06K OHM (1206) 1/8W 1%	E232R,R352,R362,R406
325516-04	SIL 4PIN HEADER	CN12,FLOPPY POWER/LED	391154-03	SM 1K (1206) 1/8W 1%	E524R
903345-17	DIL 34PIN HEADER W/KEY (PIN3)	CN11 FLOPPY SIGNAL	391154-04	SM 2K (1206) 1/8W 1%	
391153-01	DIL 44PIN HEADER W/KEY (PIN20)	CN16 HDD	391093-01	SM 1 OHM (2512) 1W 5%	
391073-01	68 PIN RIGHT ANGLE HIGH DENSITY	CN15 CREDIT CARD	391093-02	SM 4.7 OHM (2512) 1W 5%	
390492-02	30 PIN LOCKING ZIF FFC	CN13 KEYBOARD	391093-04	SM 47 OHM (2512) 1W 5%	
391314-01	HEADER RT ANGLE 4 PIN POLARIZED	CN14 LED			
TRANSISTORS AND DIODES			CAPACITORS		
391145-01	TRANS JFET MPF102/PN4302 SOT23	Q321,Q331	390818-03	SM NPO 15PF (1206)	(C242 PAL)
391121-01	TRANS NPN 2N3904 SOT23	Q211-Q213,Q231-Q233,Q511,Q571,Q621,Q622,Q651,Q653,(Q461 PAL),Q341,Q631-Q633,Q652,Q654	390818-04	SM NPO 47PF (1206)	E258C-E260C,E-692C,E693C,E150C,E151-E154,E694C
391122-01	TRANS PNP 2N3906 SOT23	D571	390818-05	SM NPO 56PF (1206)	C245, (C241 PAL)
391129-01	DIODE 1N4148 SOT23	D572-D576			
391128-01	DIODE 1N914 SOT23 (SUB FOR 391129-01)				
391327-01	DIODE 1N4001 MELF				
RESISTORS — 1/8W 5% UNLESS OTHERWISE SPECIFIED					
310026-26	SM 0 OHM (1206) NTSC JUMPERS	E321R,E331R,R202,R225,(R624-R626 NOT STUFFED)			
310026-26	SM 0 OHM (1206) PAL JUMPERS	E321R,E331R,R203,(R624-R626 NOT STUFFED)			
310026-10	SM 27 OHM (1206)	R113,R114,R152B-R152H,E112R,E120R-E129R,E150R			
310026-01	SM 47 OHM (1206)	E253R-E256R,E577R,E561R,E562R,E524R			

Commodore International Spare Parts List

PCB Components (Continued)

PCB Assembly A600

CAPACITORS (Continued)			CAPACITORS (Continued)		
390818-06	SM NPO 100PF (1206)	E231C,E251C-E257C, E261C,E262C,E266C, E267C,E511C-E523BC, E525C,E551C,E552C, E558C,E581C-E596C E351C,E353C,E354C, E361C,E363C,E364C, E371C-E374C,E553C- E556C (C243 PAL) C323,C333 E321C,E331C,C322,C332, E355C-E358C,E365C- E368C C246,C26,C27,C28A, C28B,C29,C33,C34,C36, C349,E597C,E598C,C591, C613,C800-C803,E232C, E263C-E265C,E524C, E557C,E561C,E562C, C592,C7,C8, (C244 PAL) C311-C314,C352 C221,C222,C362,C611, (C321,C331,NOT STUFFED) C12A,C12B,C13,C14, C16A,C16B,C17A,C17B, C1A,C1B,C2-C4,C21, C211-C213,C22,C25, C301,C302,C305,C31, C41-C43,C32,C551,C552, C5A,C5B,C6,C701,C702, C711,C804,C199,C44- C47	390818-01	SM NPO 22PF (1206)	E112C,E122C-E129C, C621,C622 C214,C306,C460,C612 C303,C304,C324,C334, C459 C821,C822 C235,C236,C239,C409 C408,C811 C237,C307
390853-06	SM X7R 470PF (1206)		391097-07	ALUM ELECT 10UF 25V SM (C)	
390853-07	SM X7R 1000PF (1206)		391097-08	ALUM ELECT 22UF 25V SM (D)	
390853-08	SM X7R 3900PF (1206)		391097-04	ALUM ELECT 47UF 16V SM (D)	
390853-09	SM X7R 6800PF (1206)		391097-01	ALUM ELECT 100UF .63V SM (D)	
390853-01	SM X7R .01UF (1206)		390101-10	ALUM ELECT 1000UF 10V	
390853-04	SM X7R .047UF (1206)		390101-03	ALUM ELECT 470UF 16V	
310027-02	SM Z5U .1UF (1206)		MISCELLANEOUS		
390797-01	SM Z5U .33UF (1210)		391092-01	FILTER CHIP FERRITE BEAD LARGE (1812)	E301,FB991-FB993
			391092-01	FILTER CHIP FERRITE BEAD MEDIUM (1206)	E231R,E258R-E260R, E263R-E265R,E597R, E598R LF 1 Z221 Z222 Z221 Z222 (L241) Y621 (Y451) X1 (X1) U6 X2 (X2)
			251878-02	LINE FILTER	
			391146-02	BANDPASS FILTER NTSC (F-K5-MS)	
			391147-02	DELAY LINE NTSC (F K5 MD)	
			391146-01	BANDPASS FILTER PAL (BPF K5 MS)	
			391147-01	DELAY LINE PAL (F KS MT)	
			391138-01	INDUCTOR SM 1.2UH (1206)	
			391156-01	RESONATOR CERAMIC 3.00 MHZ	
			252345-01	XTAL 4.433619 MHZ	
			325566-14	OSCILLATOR 28.63636 MHZ NTSC	
			252344-01	OSCILLATOR 28.37516 MHZ PAL	
			904150-09	SOCKET 42 PIN DIP	
			313371-01	MODULATOR MDG VA3424 NTSC	
			313371-05	MODULATOR MDG UD 3626 PAL	
			366648-01	LABEL BAR CODE BLANK 0.5" X 1.75"	
			366649-01	LABEL BAR CODE BLANK 0.5" X 1.00"	

Schematic #315987, Rev. C
Sheet 1 of 13

JUMPERS AND STUFF

[illegible]

SIGNAL GLOSSARY

SIGNAL	DESCRIPTION (AREA)	PAGES
28MHZ	28.63636 MHZ MASTER CLOCK	
7MHZ	7.15909 MHZ PROCESSOR CLOCK	
A[23:1]	PROCESSOR ADDRESS BUS (68000)	
ACK	DATA ACKNOWLEDGE (PARALLEL PORT)	
AS	ADDRESS STROBE (68000)	
AUDIN	AUDIO INPUT (RS232 PORT)	
AUDOUT	AUDIO OUTPUT (RS232 JACK)	
BEER	BUS ERROR (68000)	
BO	BUS ORANT (68000)	
BOACK	BUS ORANT ACKNOWLEDGE (68000)	
BLISS	BLITTER SLOWDOWN (CHIPS)	
BLIT	CHIP MEMORY ACCESS (CHIPS)	
BR	BUS REQUEST (68000)	
BUSY	DEVICE BUSY (PARALLEL PORT)	
CASL/U	COLUMN ADDRESS STROBE (DRAM)	
CCK/CKO	COLOR CLOCK / QUADRATURE (CHIPS)	
CDAC	7.15909 MHZ QUADRATURE CLOCK (CHIPS)	
CHNG	MEDIA CHANGE (FLOPPY)	
CLKRD/WR	READ-TIME CLOCK READ / WRITE (RTC)	
COMP	MONOCHROME COMPOSITE VIDEO (VIDEO)	
CSYNC	COMPOSITE SYNC (VIDEO)	
CTS	CLEAR TO SEND (RS232 PORT)	
D[15:0]	PROCESSOR DATA BUS (68000)	
DIR	STEP DIRECTION (FLOPPY)	
DKRD	DISK READ DATA (FLOPPY)	
DKWD	DISK WRITE DATA (FLOPPY)	
DKWE	DISK WRITE ENABLE (FLOPPY)	
DMAL	CHIP DMA REQUEST LINE (CHIPS)	
DRAM[8:0]	DRAM ADDRESS BUS (DRAM)	
DRD[15:0]	DRAM DATA BUS (DRAM)	
DSR	DATA SET READY (RS232 PORT)	
DTACK	DATA TRANSFER ACKNOWLEDGE (68000)	
DTR	DATA TERMINAL READY (RS232 PORT)	
E	PERIPHERAL ENABLE CLOCK (68000)	
EXTICK	EXPANSION PRESENT / RTC TICK	
FC[2:0]	FUNCTION CODE (68000)	
FIRE0/1	FIRE BUTTON 0/1 (JOYSTICKS)	
HLT	PROCESSOR HALT (68000)	
HSYNC	HORIZONTAL SYNC (VIDEO)	
INDEX	INDEX PULSE (FLOPPY)	
INT[2,3,6]	INTERRUPT REQUEST (CHIPS)	
IORESET	I/O RESET	
IPL[2:0]	INTERRUPT PRIORITY LEVEL (68000)	
KBCLOCK	KEYBOARD CLOCK (KEYBOARD)	
KBDATA	KEYBOARD DATA (KEYBOARD)	
KBRESET	KEYBOARD RESET (KEYBOARD)	
LDS/UDS	UPPER / LOWER DATA STROBES (68000)	
LED	POWER ON LED / AUDIO FILTER DISABLE	
LEFT/RIGHT	LEFT RIGHT AUDIO (AUDIO)	

A600 SYSTEM SCHEMATICS

CONNECTORS


REF	TYPE	DESCRIPTION	PAGE
CN1	DB9P	MOUSE/JOYSTICK 1	5
CN2	DB9P	MOUSE/JOYSTICK 2	5
CN3	RCA-J	RIGHT AUDIO OUTPUT	5
CN4	RCA-J	LEFT AUDIO OUTPUT	5
CN5	DB23S	EXTERNAL FLOPPY	8
CN6	DB25P	RS232 SERIAL PORT	7
CN7	DB25S	PARALLEL PRINTER PORT	7
CN8	SQ DIN	POWER SUPPLY CONNECTOR	13
CN9	DB23P	VIDEO OUTPUT	6
CN10	RCA-J	COMPOSITE VIDEO	4
CN11	DIL-34	INTERNAL FLOPPY SIGNAL	8
CN12	SIL-4	INTERNAL FLOPPY POWER	8
CN13	MEM-30	KEYBOARD MEMBRANE	9
CN14	SIL-4	INTERNAL FLOPPY POWER	8
CN13	MEM-30	KEYBOARD MEMBRANE	9
CN14	SIL-4	KEYBOARD STATUS LED'S	9
CN15	PCMCIA	PC "MEMORY CARD"	11
P9	EDGE-80	MEMORY BUS EXPANSION	12

[illegible]


KEY COMPONENTS

PART	CHIP	DESCRIPTION	PAGE
U1	68000	68000 PROCESSOR. 8MHZ	2
U2	8375	ECS AGNUS A300/A500+	2
U3	8364	PAULA	5
U4	8373	ECS DENISE	4
U5	4145-20	CAYLE GATE ARRAY	2,8,11
U6	ASST	ROM 256KX16, 200 NS	10
U7-8	8520	AMIGA VIA. 1 MHZ	7
U10-11	28F10	FLASH MEMORY 128KX8	10
U12	CXA1145	SONY VIDEO ENCODER	4
U13	6570-36	AMIGA KEYBOARD MPU	9
U14	NE555	RESET TIMER	9
U16-17	ASST	DRAM 256KX16, 120 NS	3
U15	LF347	BIMOS OP-AMP	5
	TL084	BIMOS OP-AMP	ALT
U28	1488	EIA LINE DRIVER	7
U29	1489	EIA LINE RECEIVER	7
X1	OSC	TTL 28.63636 MHZ NTSC	2
	OSC	TTL 28.37512 MHZ PAL	ALT
Y451	XTAL	4.43619MHZ PAL BURST	4
Y621	XTAL	3MHZ CERAMIC RESONATOR	9
X2	ASST	PAL VIDEO MODULATOR	4
	ASST	NTSC VIDEO MODULATOR	4


Schematic #315987, Rev. C
Sheet 2 of 13

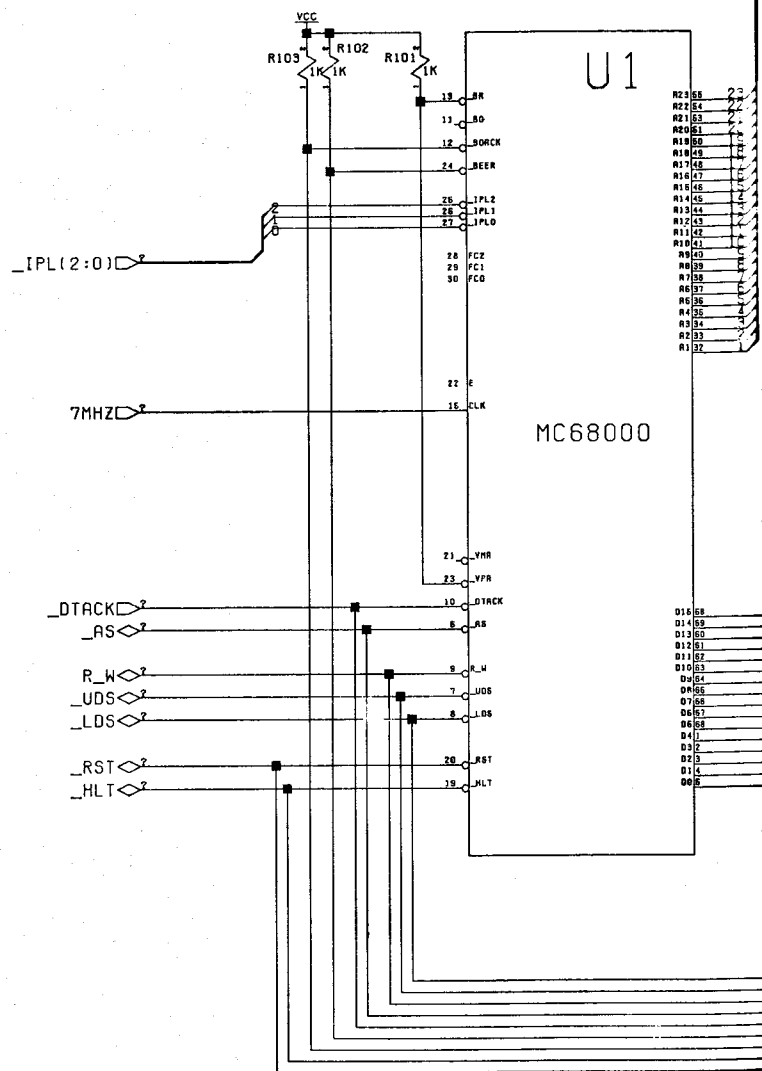


JUNE BUG
 10/22/91




A600 SYSTEM SCHEMATICS

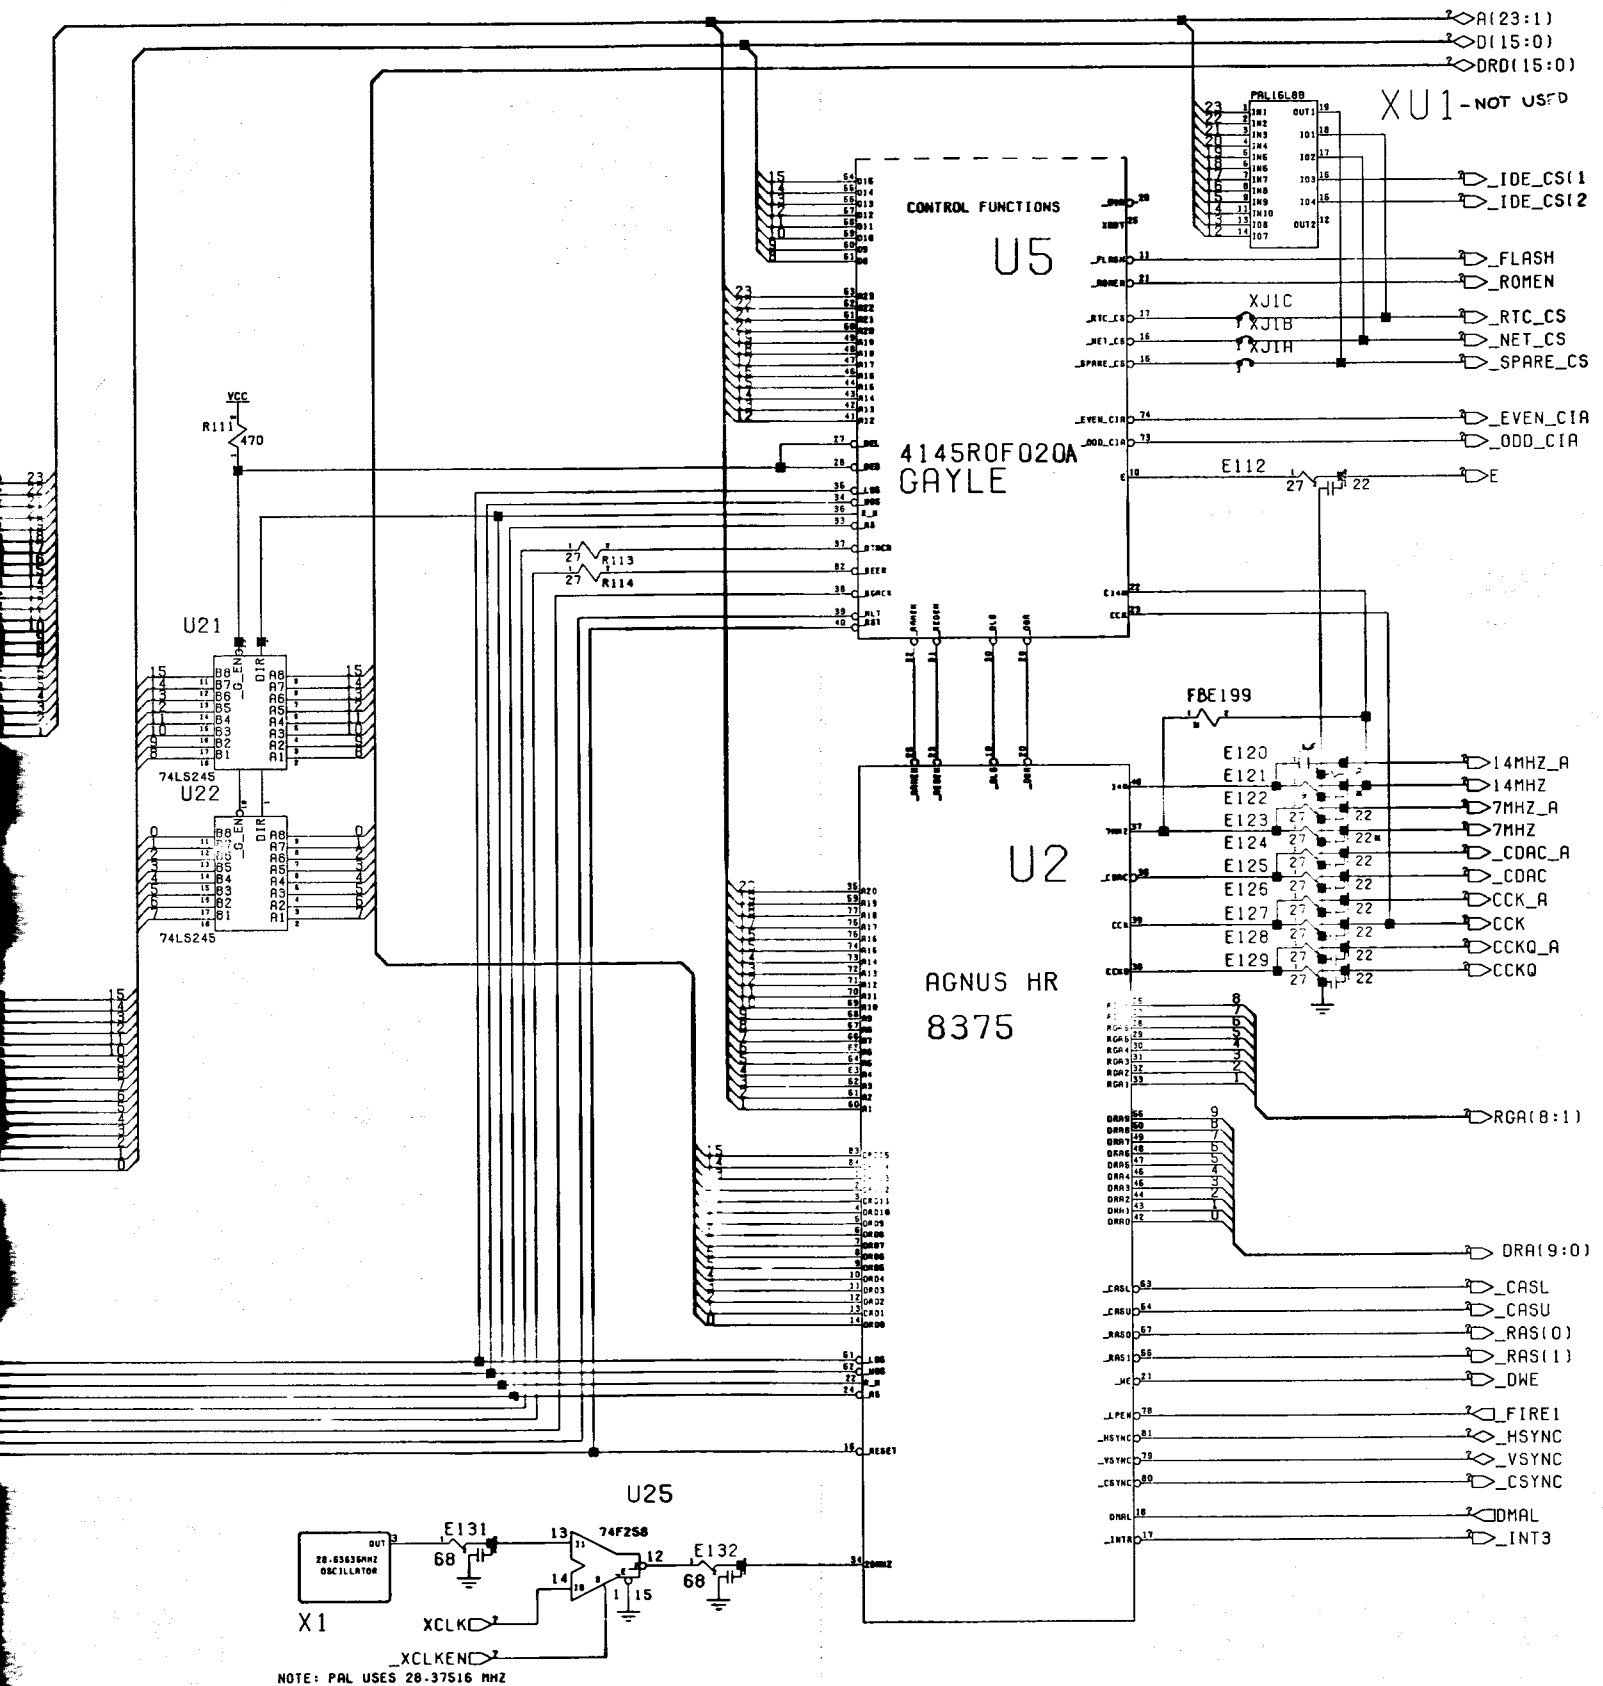



Schematic #315987, Rev. C
Sheet 3 of 13

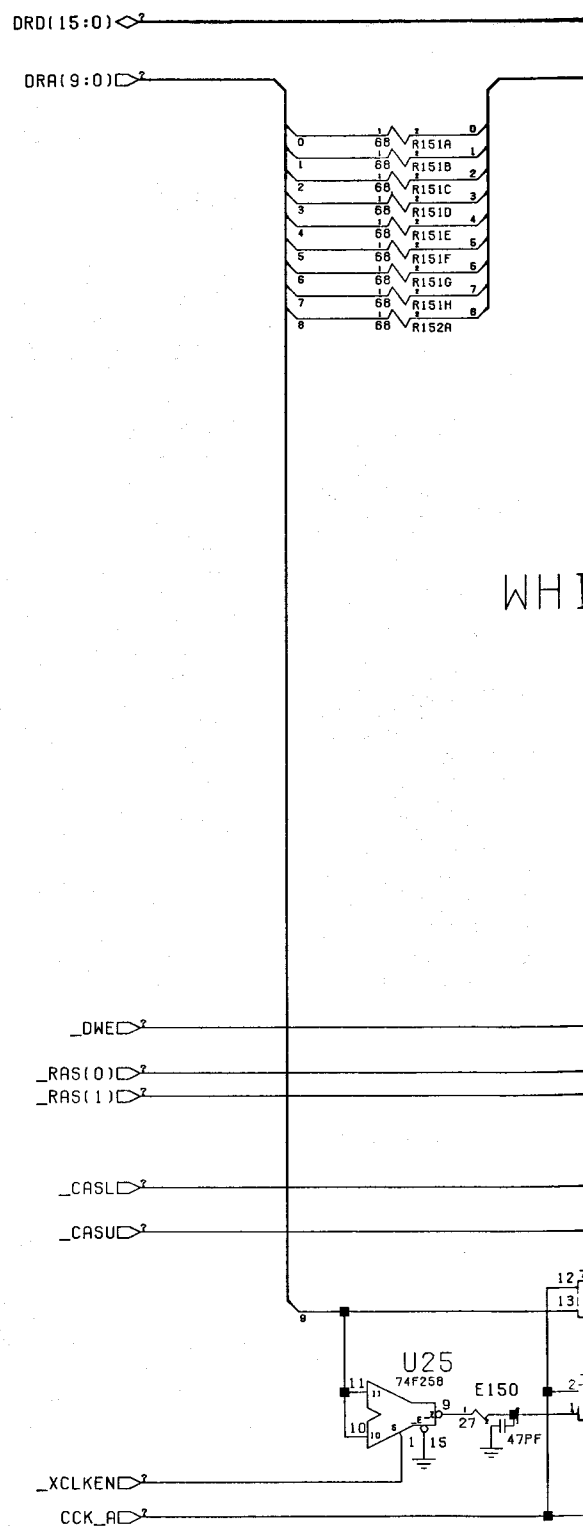


A600 SYSTEM SCHEMATICS

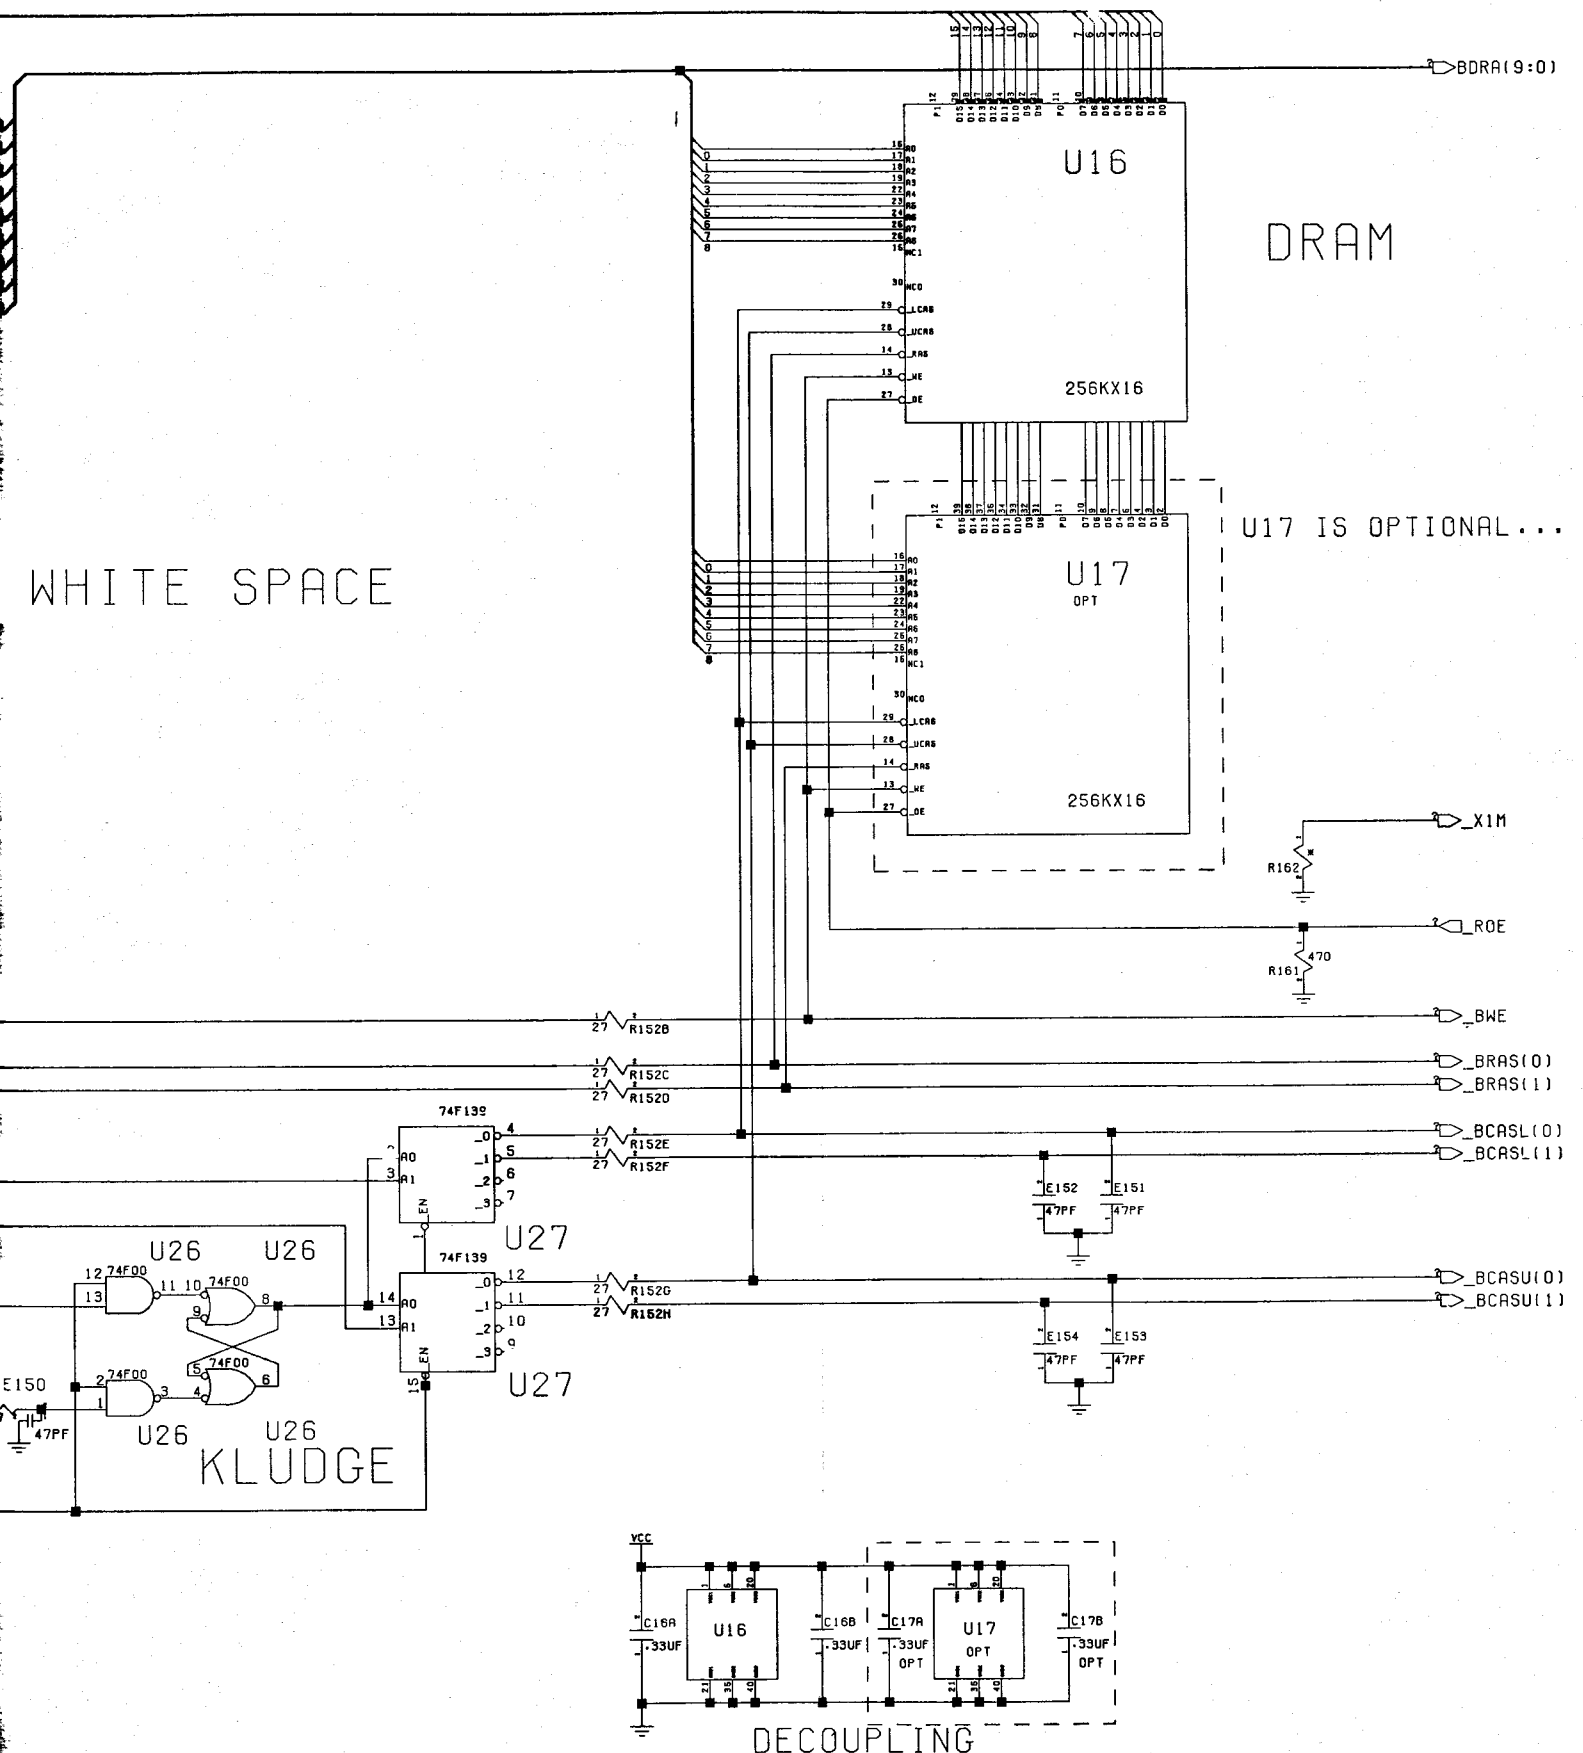



Schematic #315987, Rev. C
Sheet 4 of 13

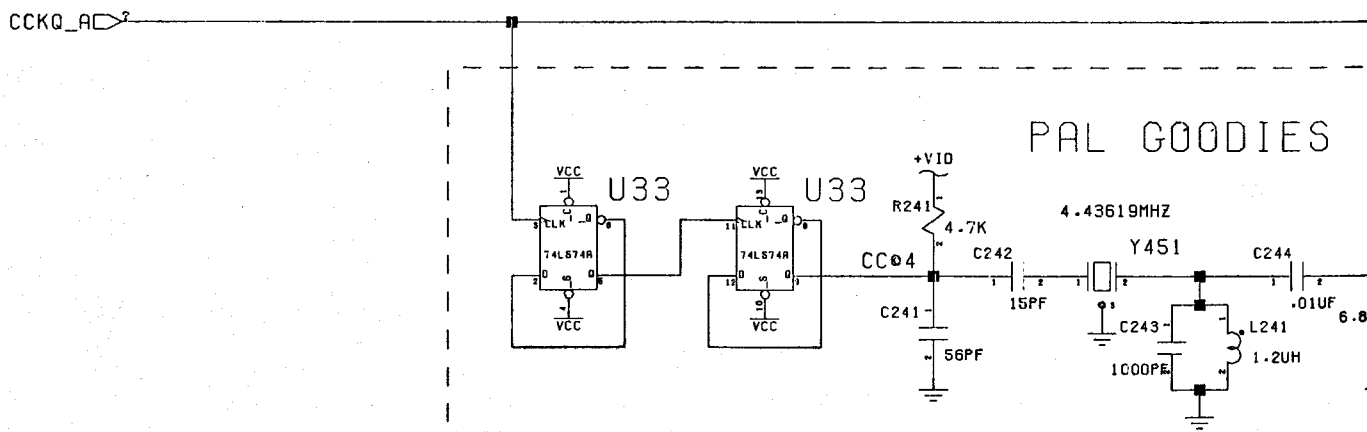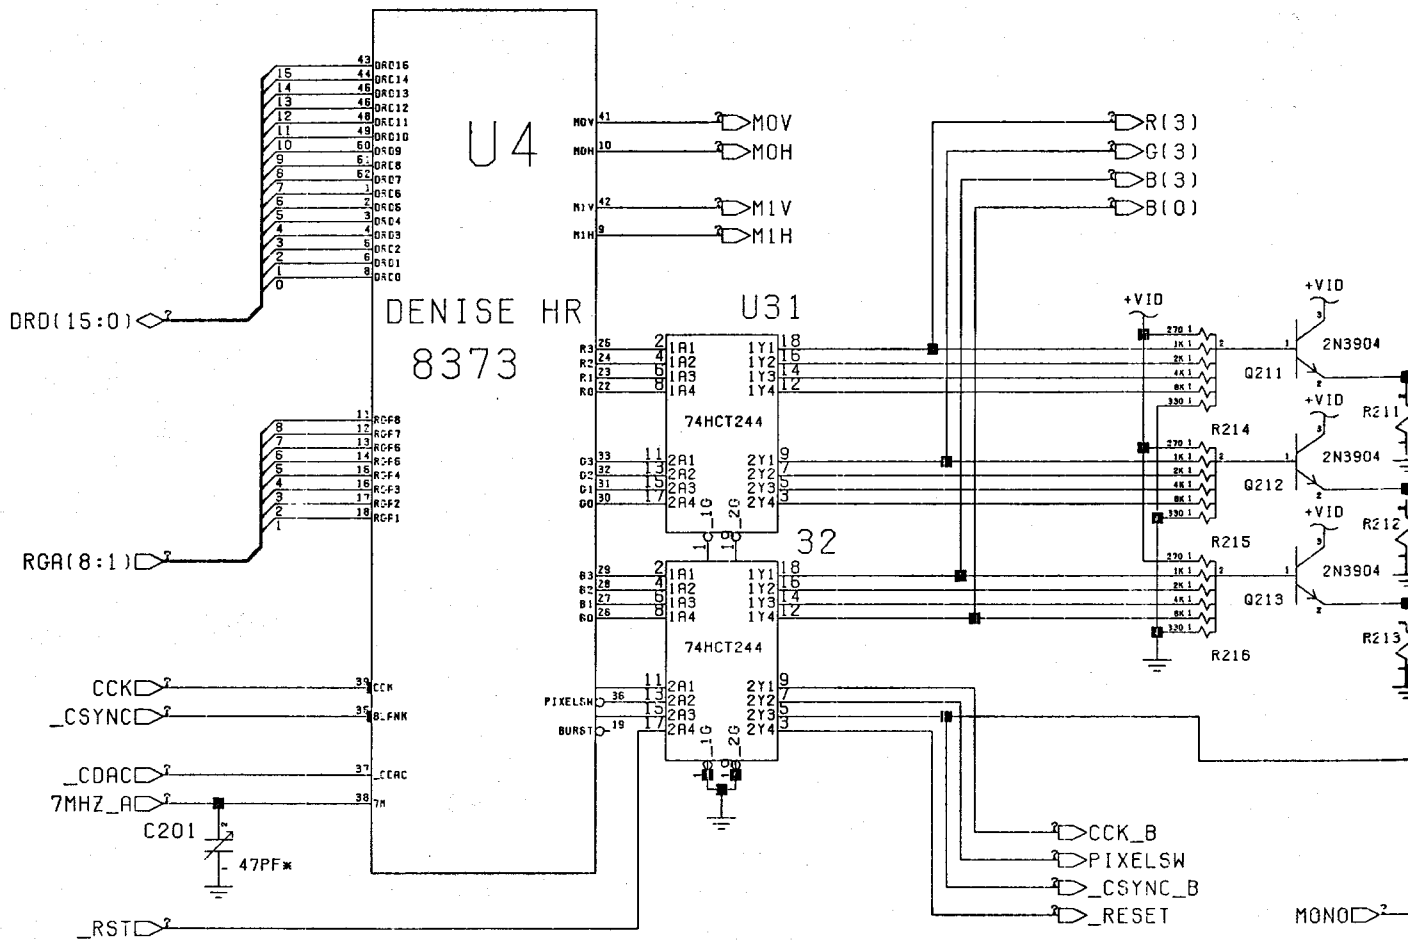

A600 SYSTEM SCHEMATICS


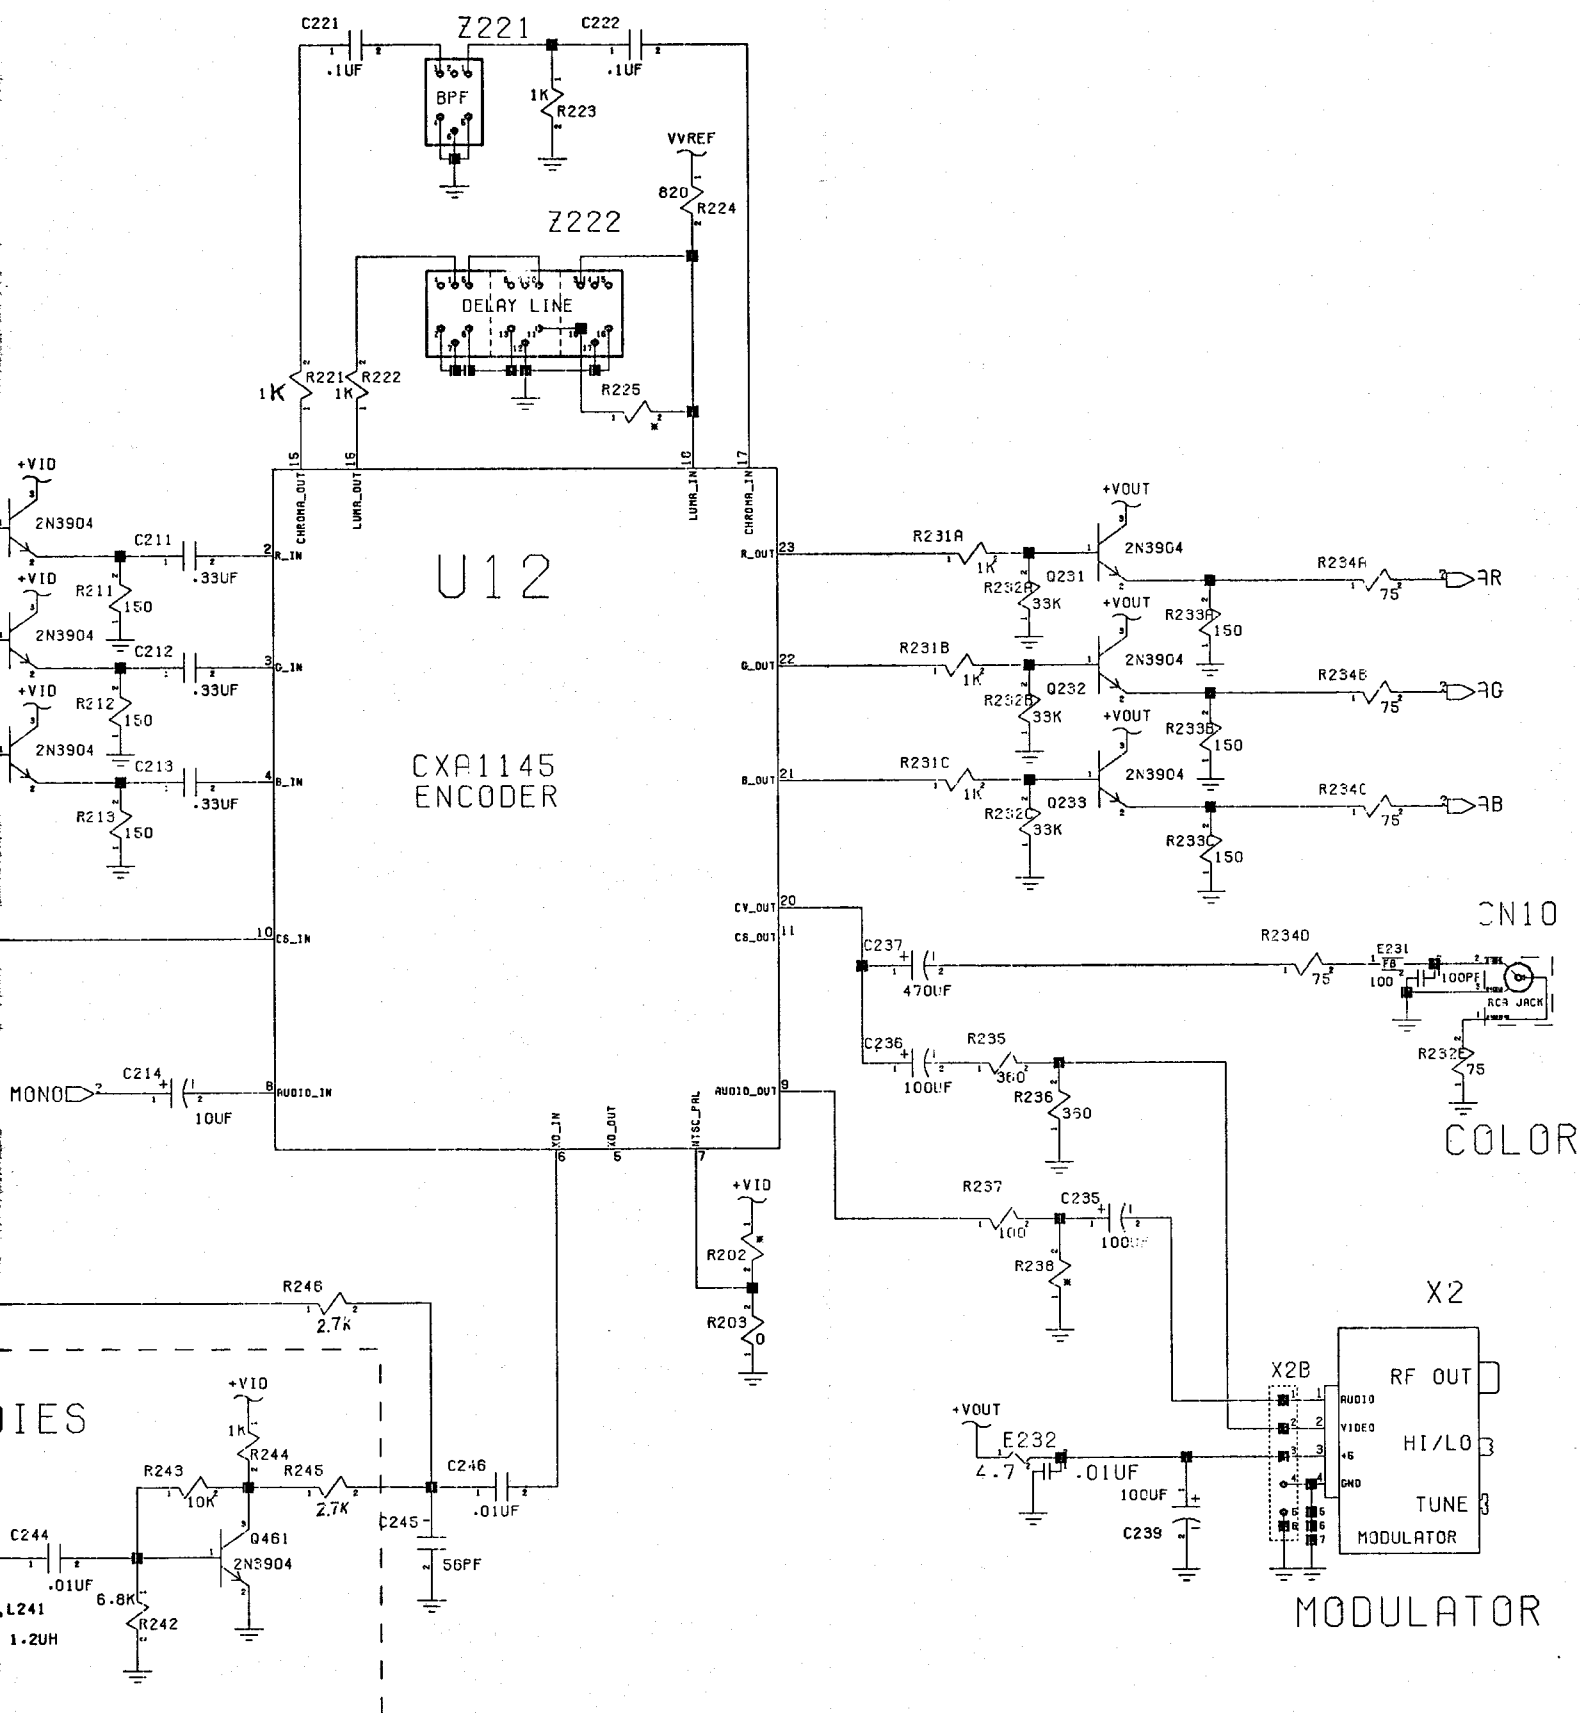


Schematic #315987, Rev. C
Sheet 5 of 13



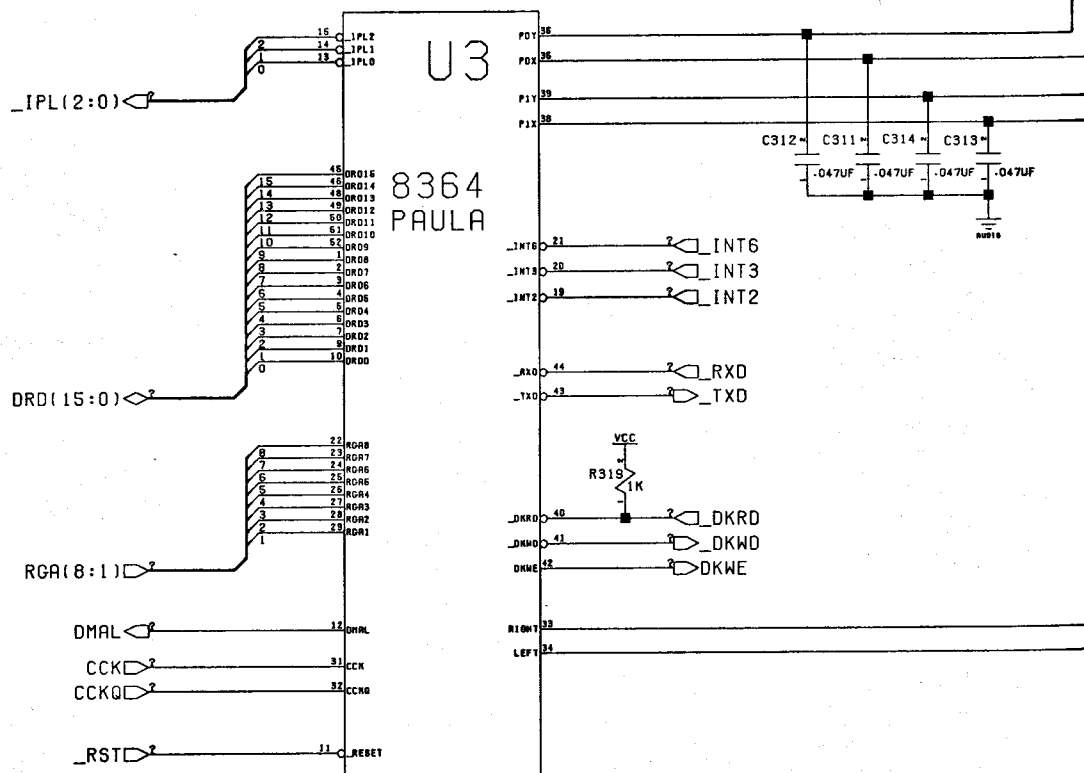


NOTE: LED OFF, FILTERS


A600 SYSTEM SCHEMATICS

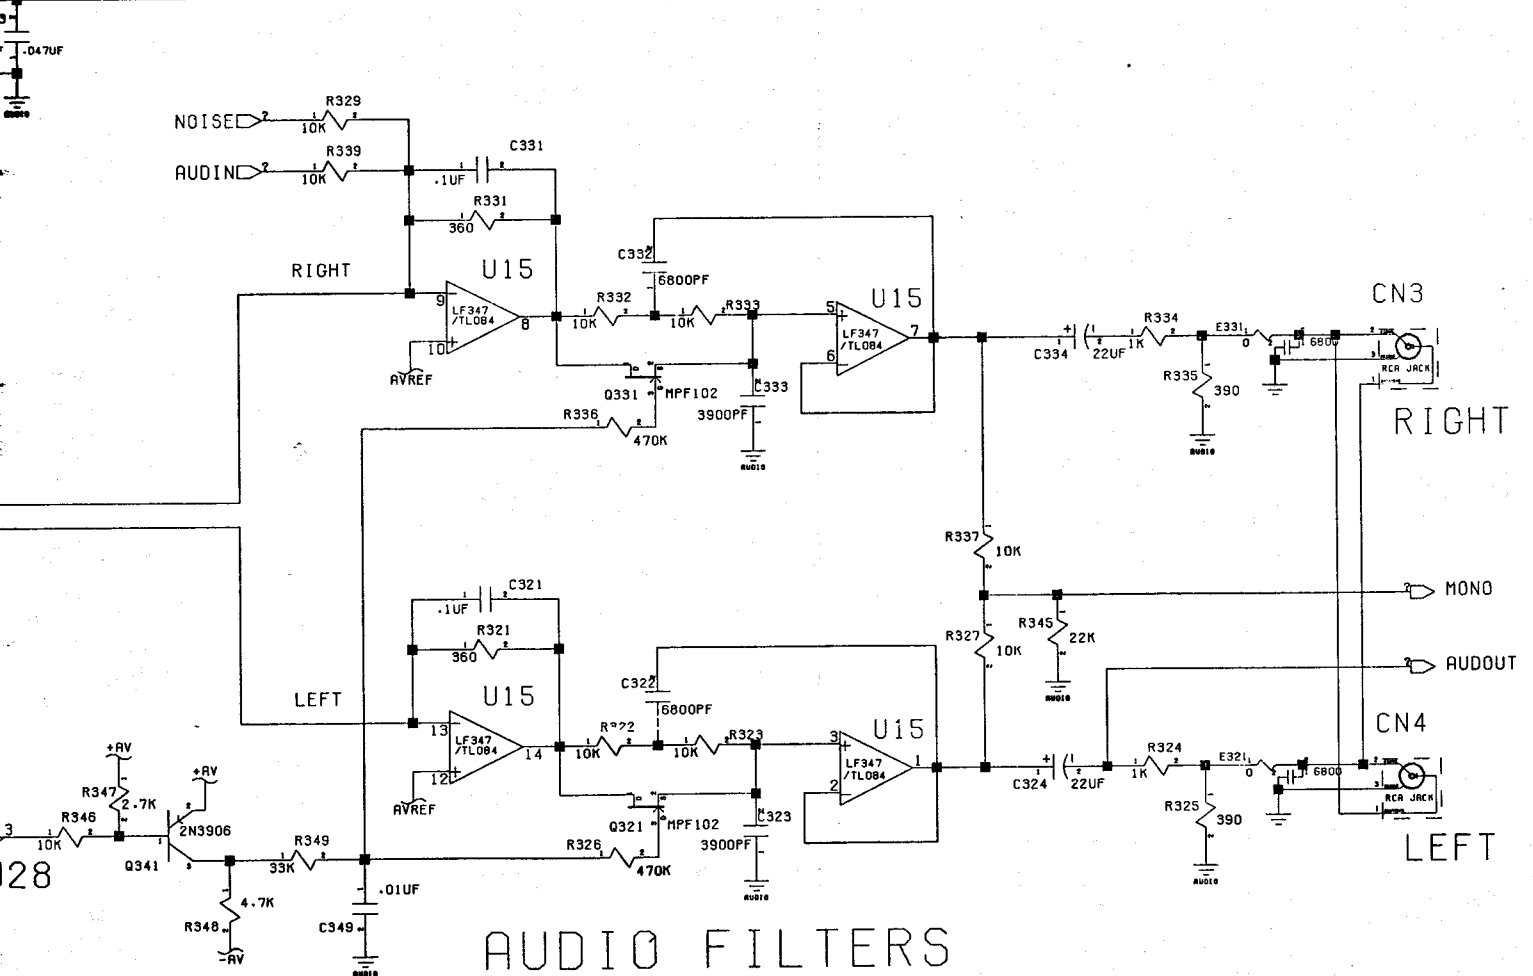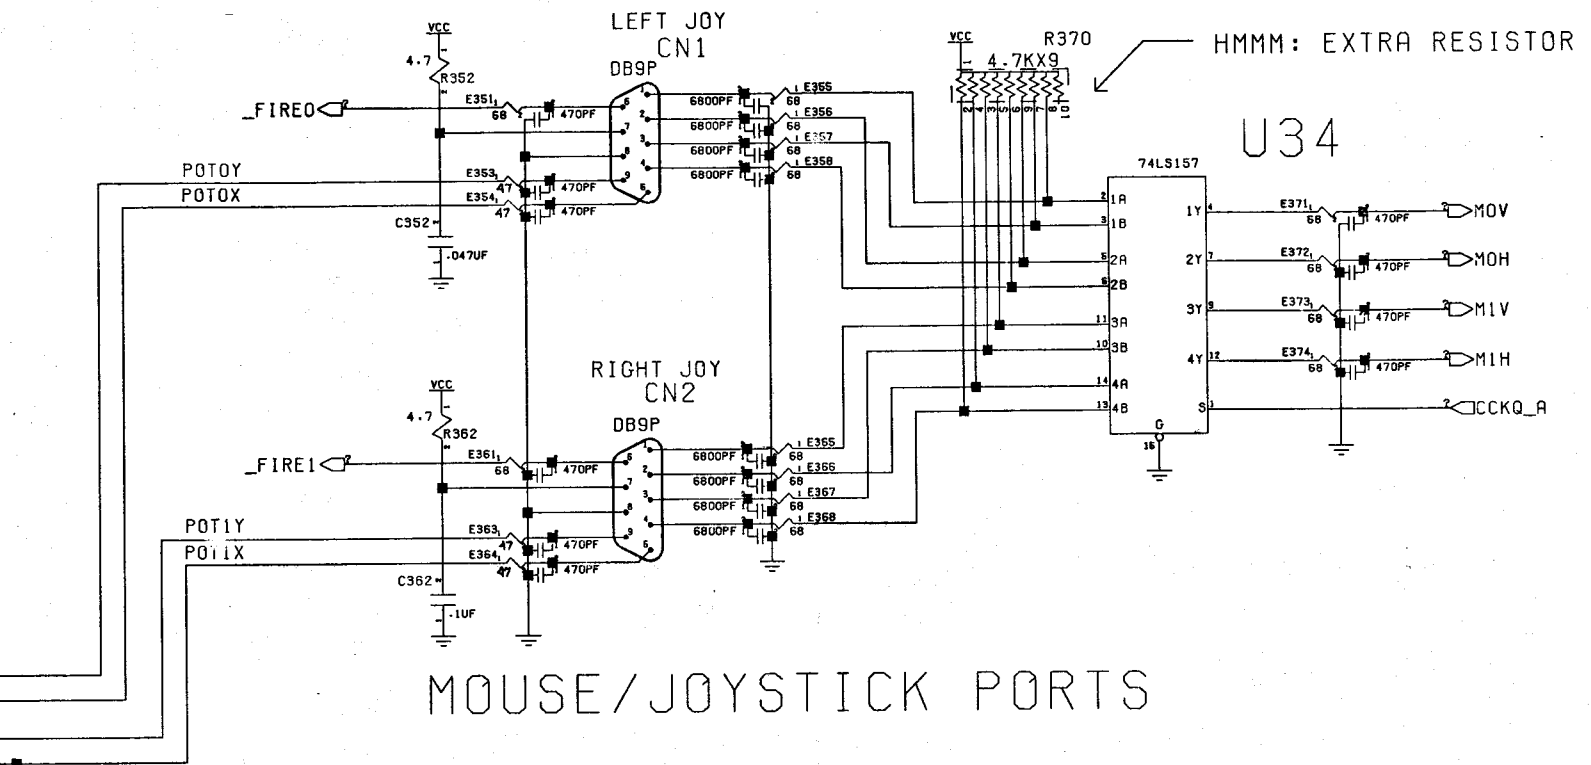


Schematic #315987, Rev. C **Sheet 6 of 13**

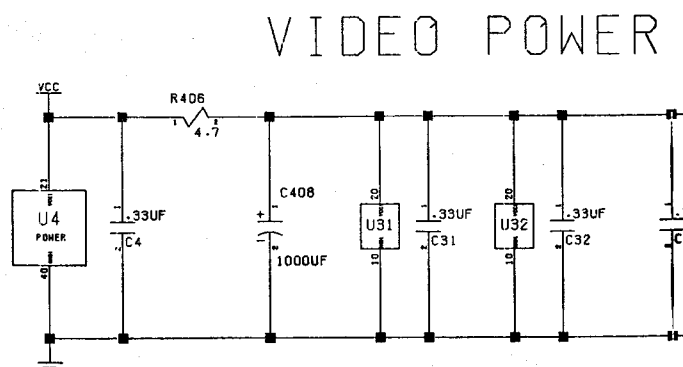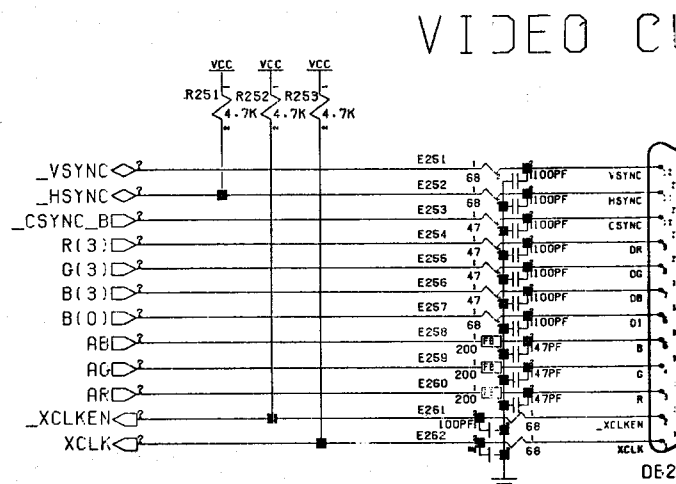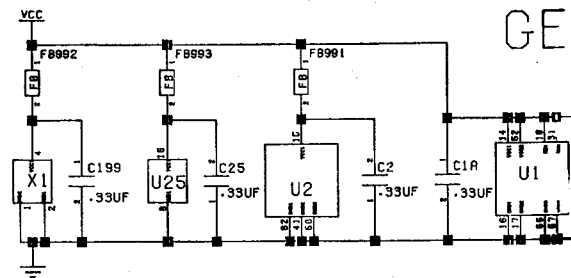


GENERAL DECOUPLING

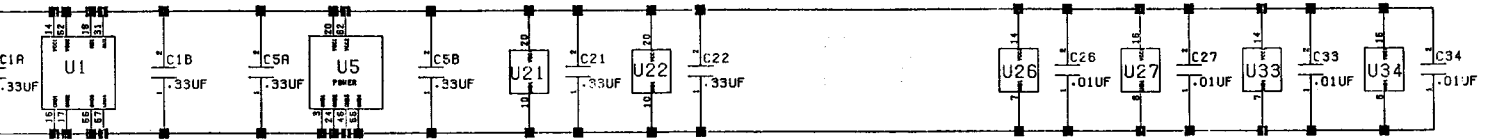

0 OUT

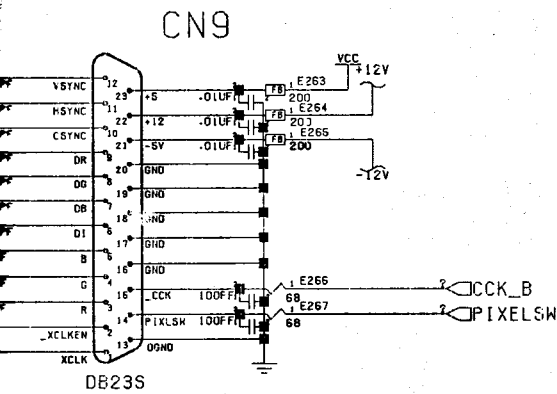


AUDIO POWER

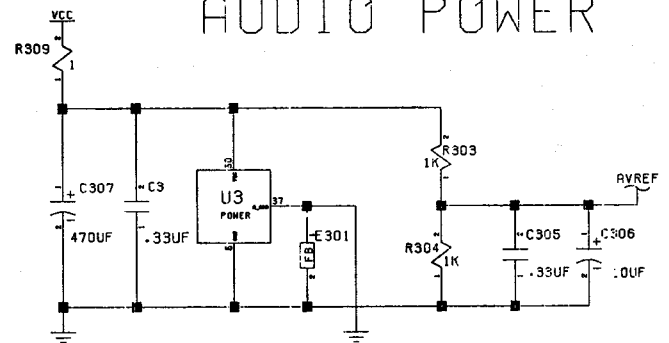


NOTE: GROUND INTERCONNECTION NEAR AUDIO JACKS.


WER

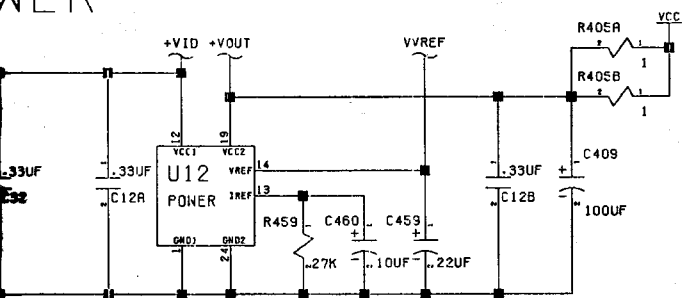

DECOUPLING

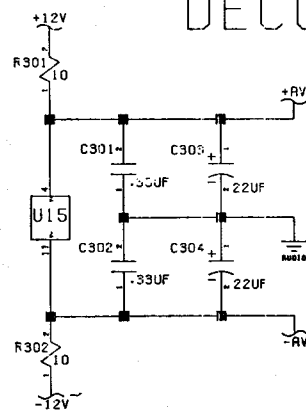

Schematic #315987, Rev. C **Sheet 7 of 13**

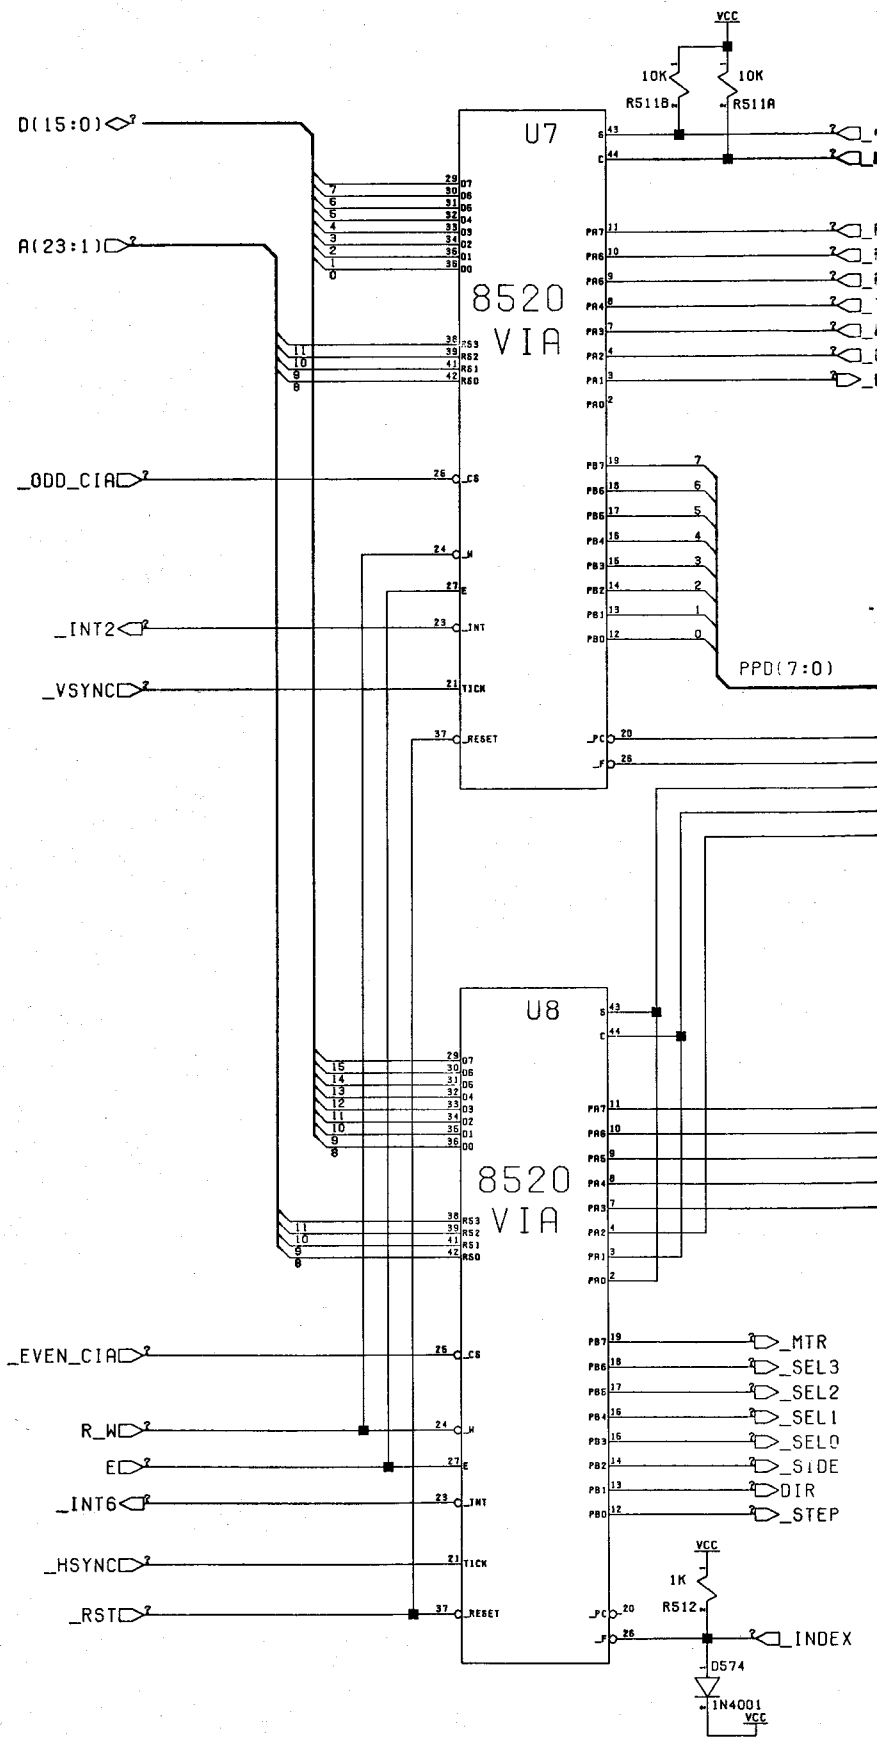

A600 SYSTEM SCHEMATICS

LOGIC TABLE PAR PORT

1 - 14 H

15 -

16 - H

17 - 25 L




KB_DATA
KB_CLOCK

FIRE1
FIRE0
RDY
TRKO
WPROT
CHNG
LED

D(7:0)


MTR
SEL3
SEL2
SEL1
SELO
SIDE
DIR
STEP

INDEX

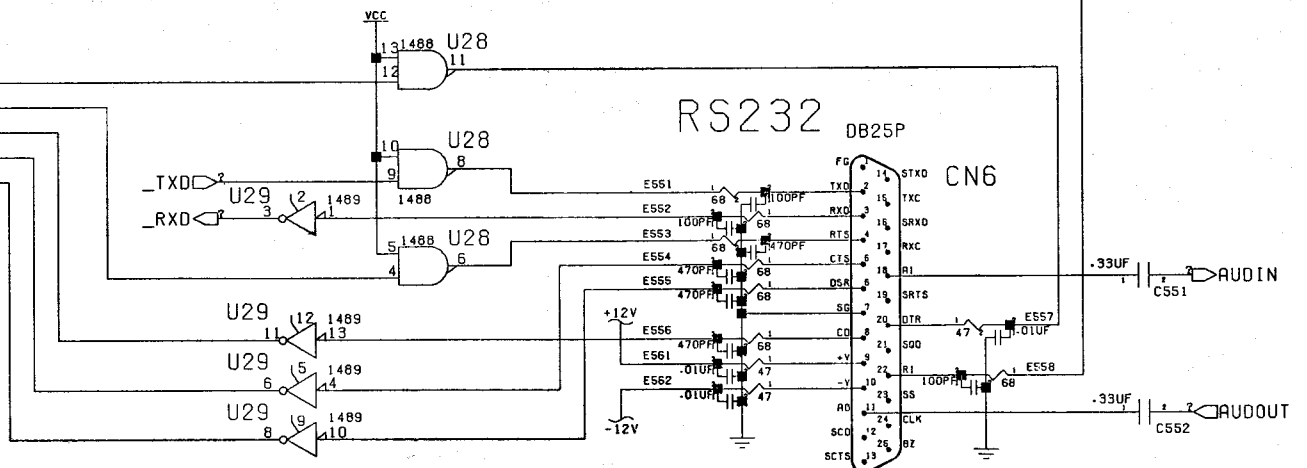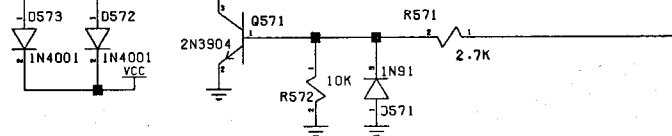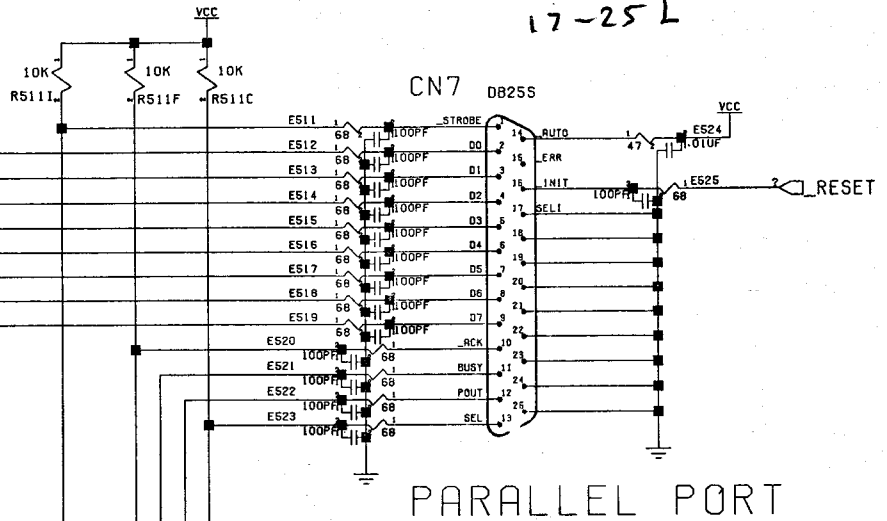


Schematic #315987, Rev. C
Sheet 8 of 13



FLOPPY L

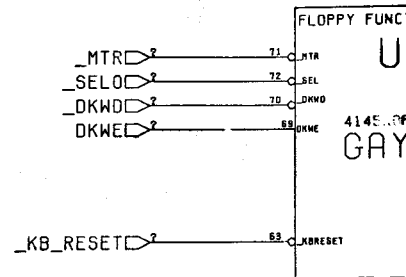

FLO





PPY LOGIC

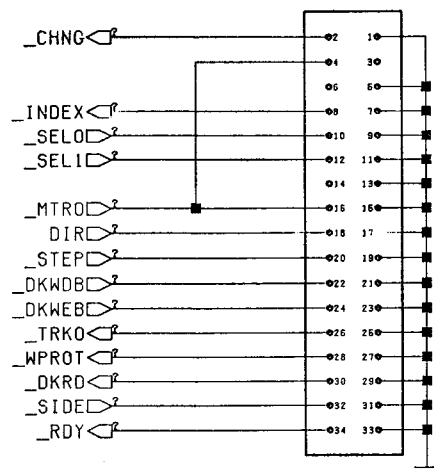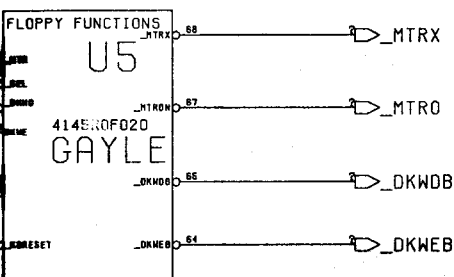


INTERNAL FLOPPY CN11



FLOPPY POWER

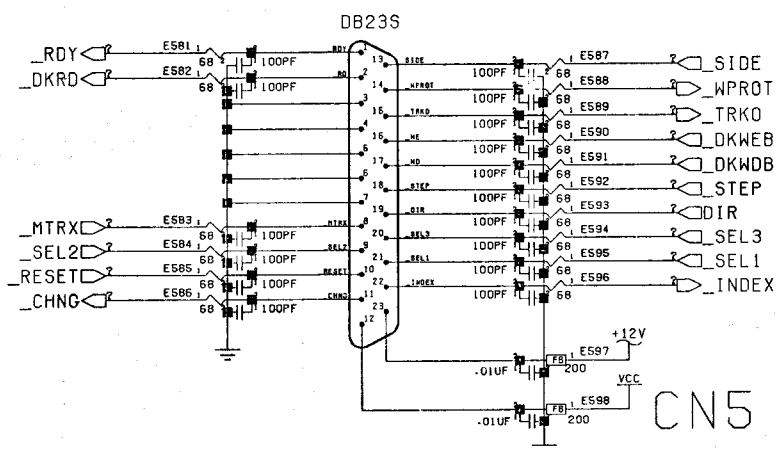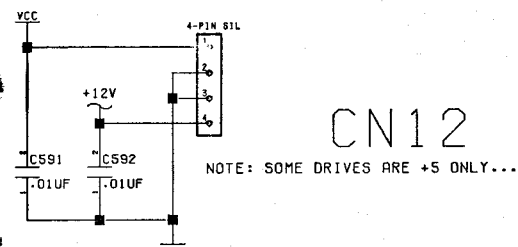

EXTERNAL FLOPPY

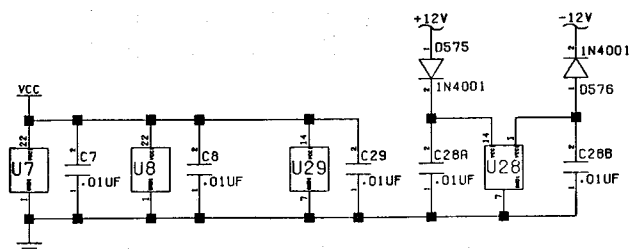


Schematic #315987, Rev. C
Sheet 9 of 13

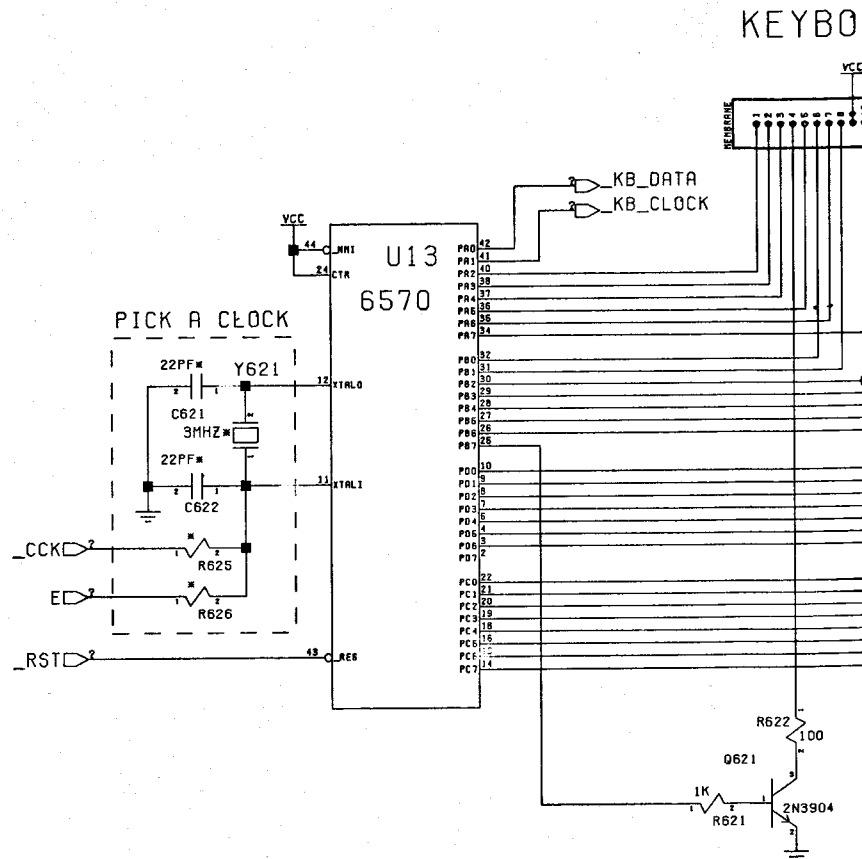


DE

A600 SYSTEM SCHEMATICS

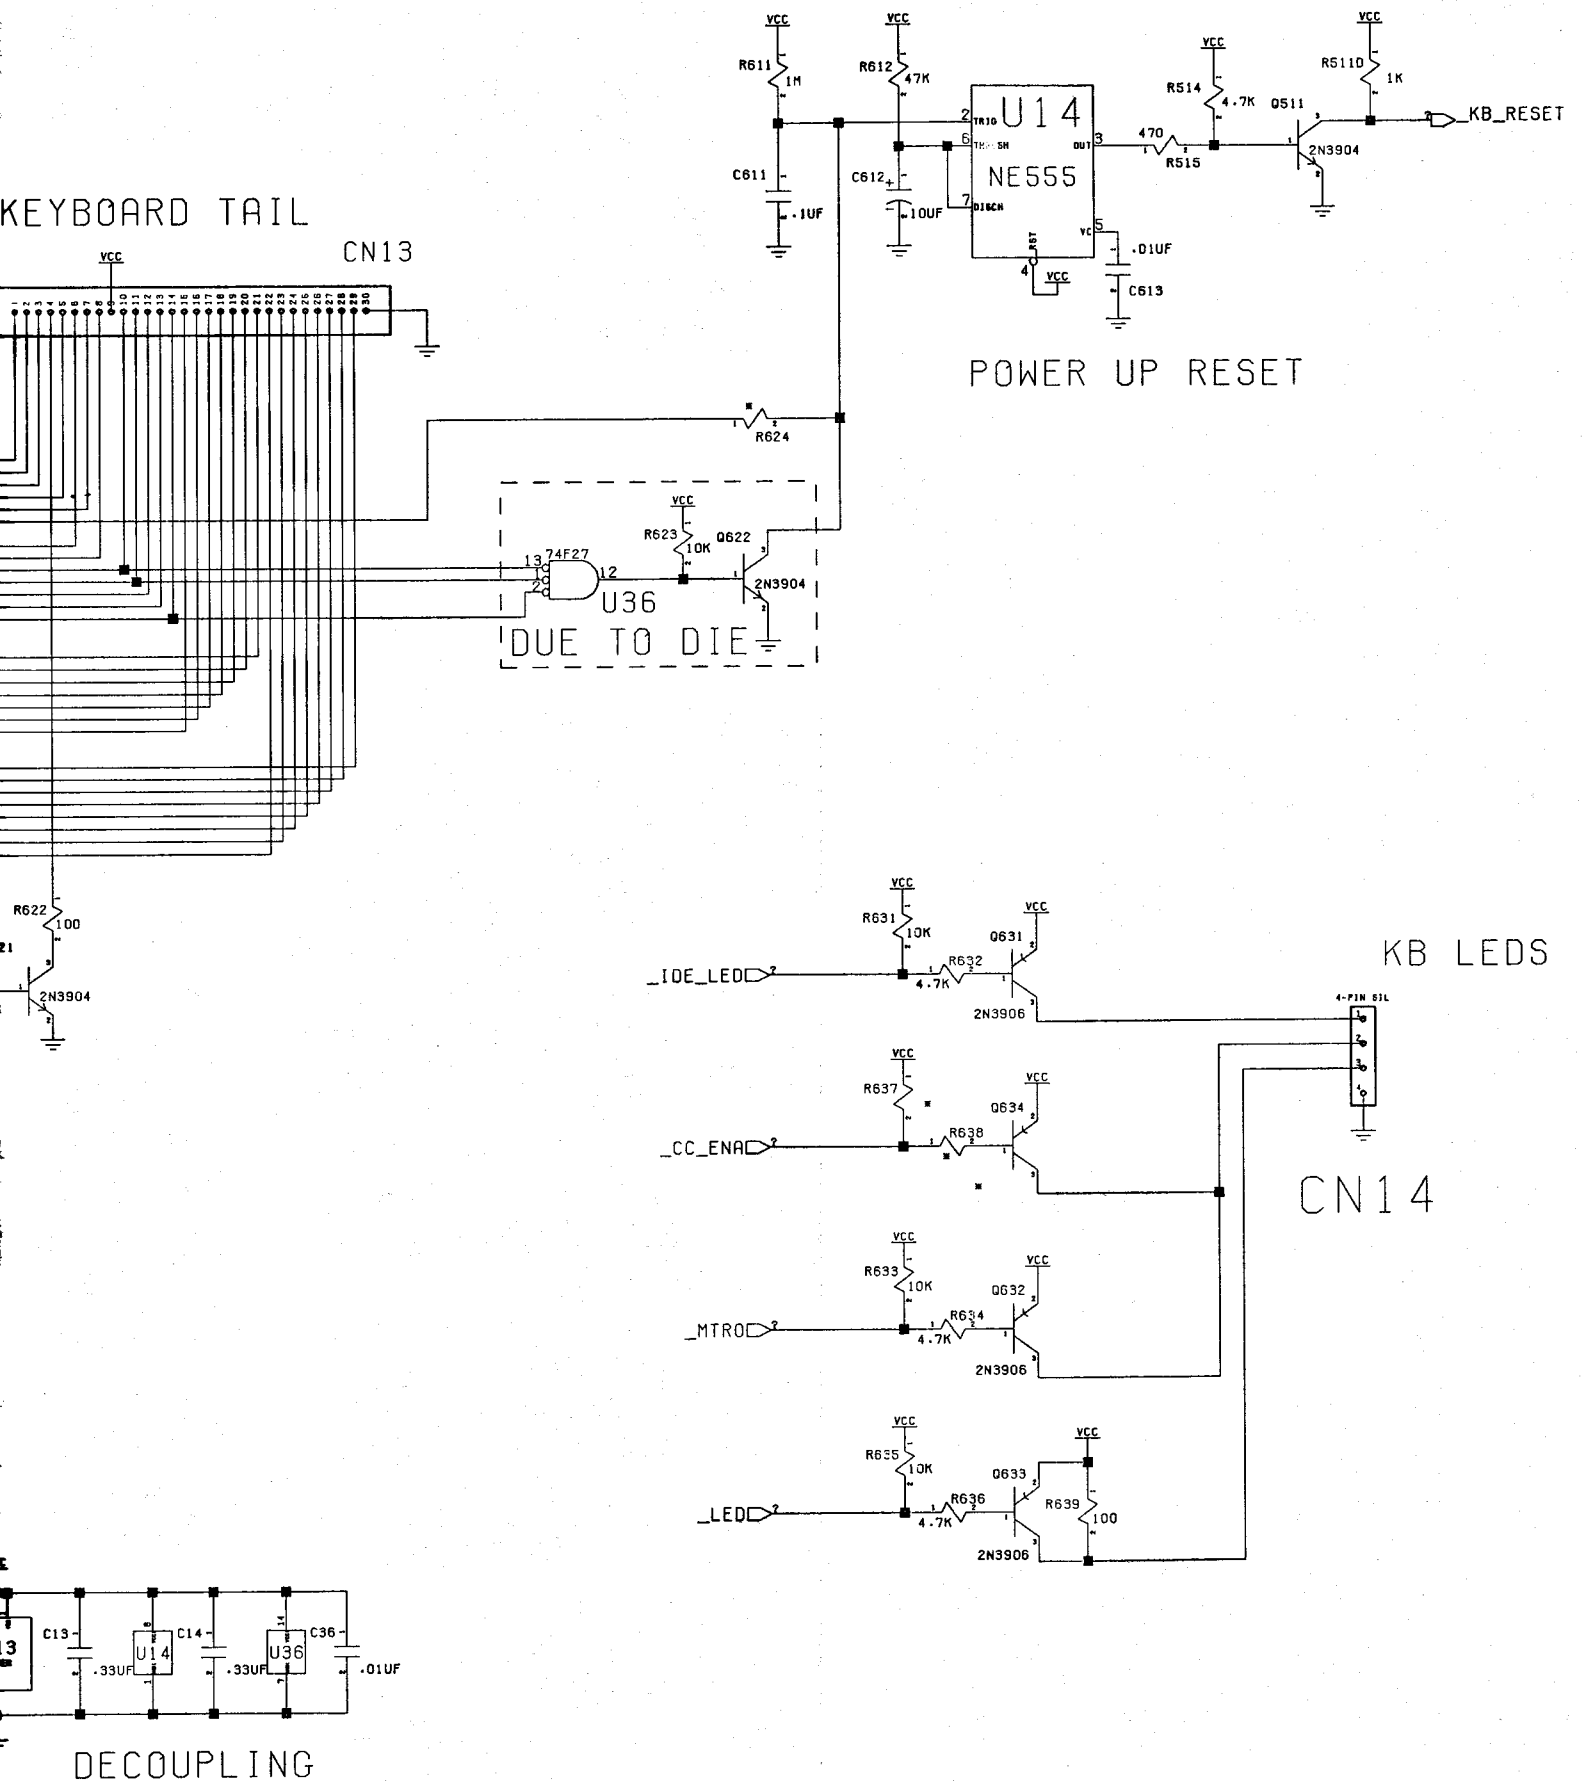


Schematic #315987, Rev. C
Sheet 10 of 13

ROM

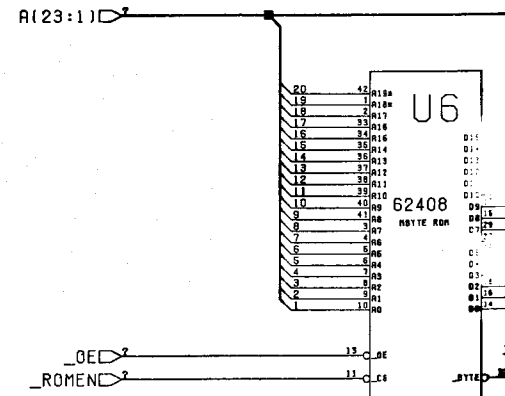


PROGRAMMING VOLTAGE


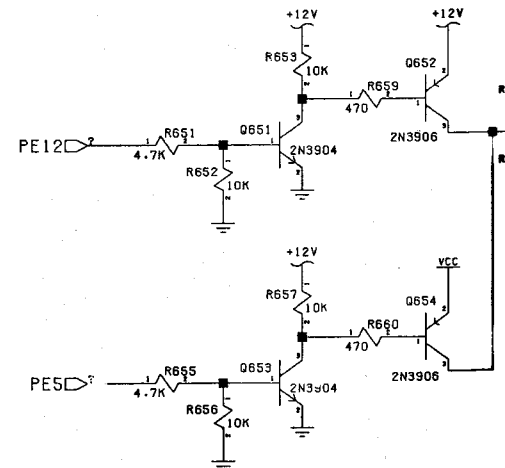


ROM


FLASH MEMORY

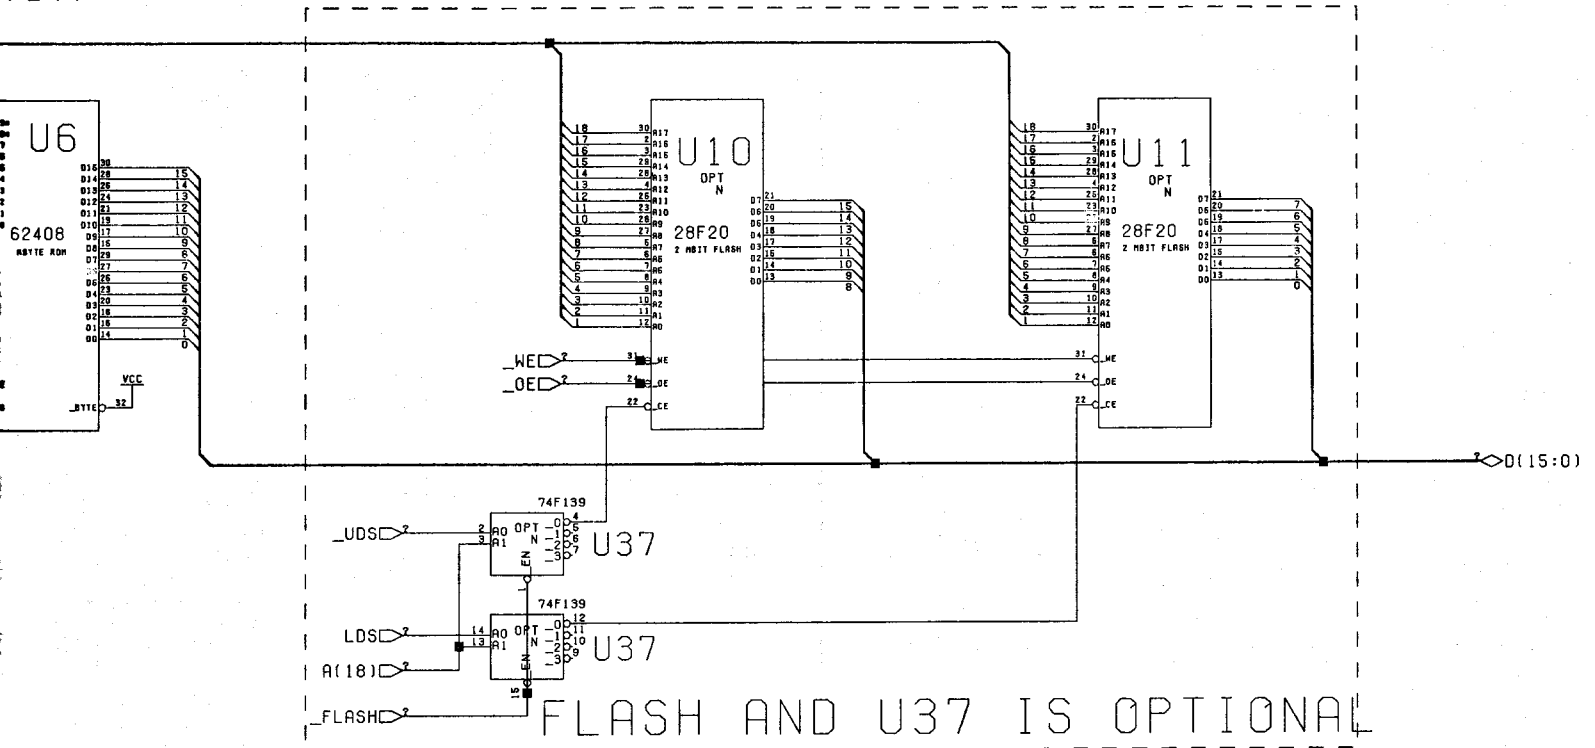

VOLTAGE

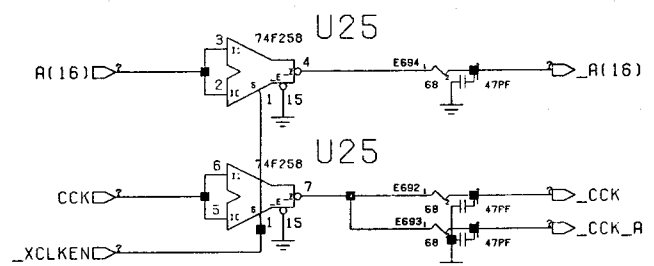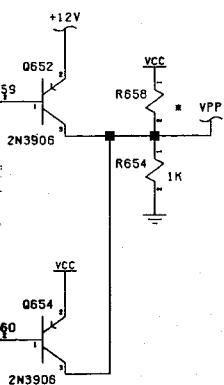


FUNNY INVERTERS

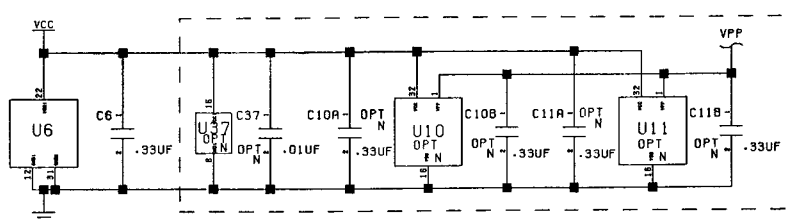


DECOUPLING

Schematic #315987, Rev. C
Sheet 11 of 13


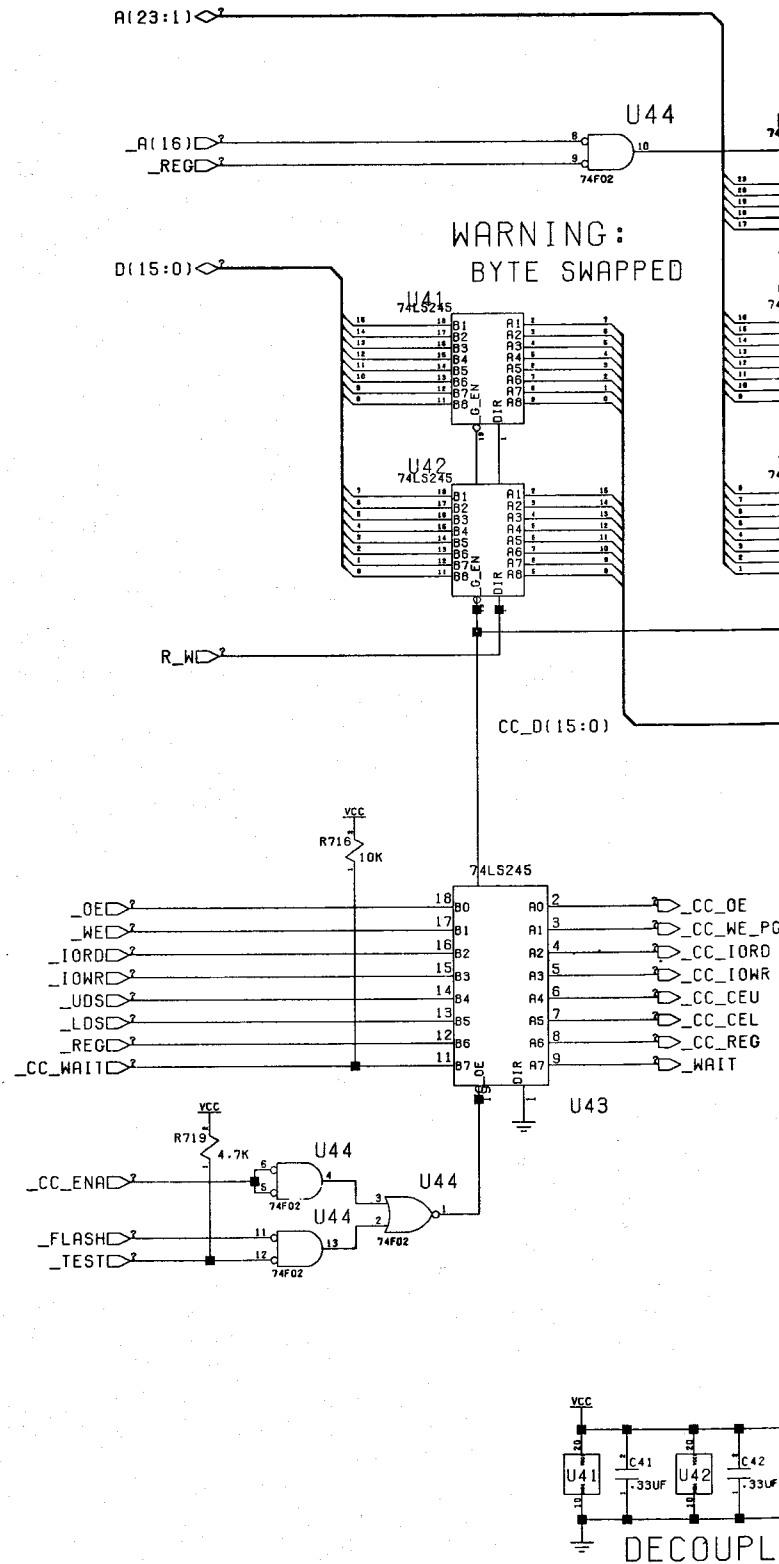


MEMORY CARD

CN15

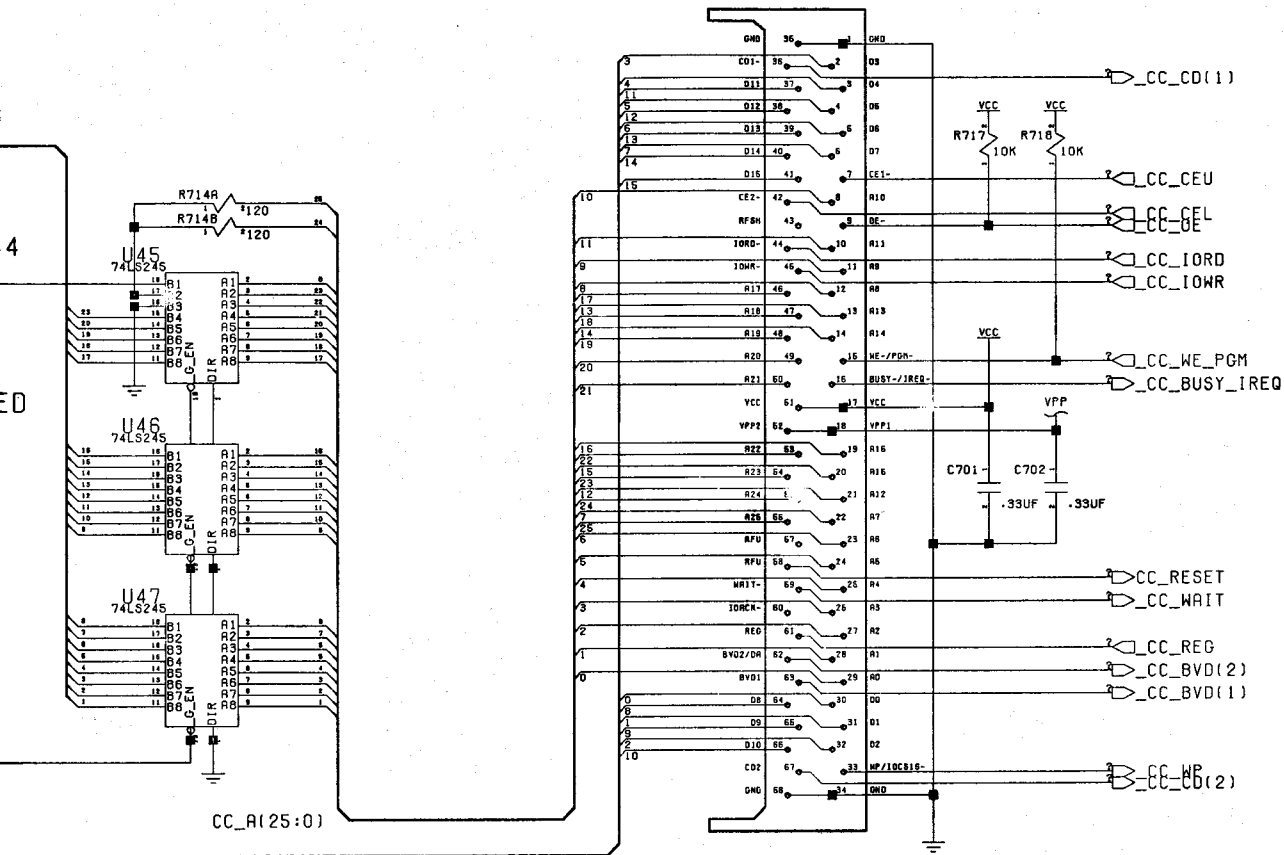


$\overline{CC_OE}$
 $\overline{CC_WE_PGM}$
 $\overline{CC_IORD}$
 $\overline{CC_IOWR}$
 $\overline{CC_CEU}$
 $\overline{CC_CEL}$
 $\overline{CC_REG}$
 $\overline{CC_WAIT}$

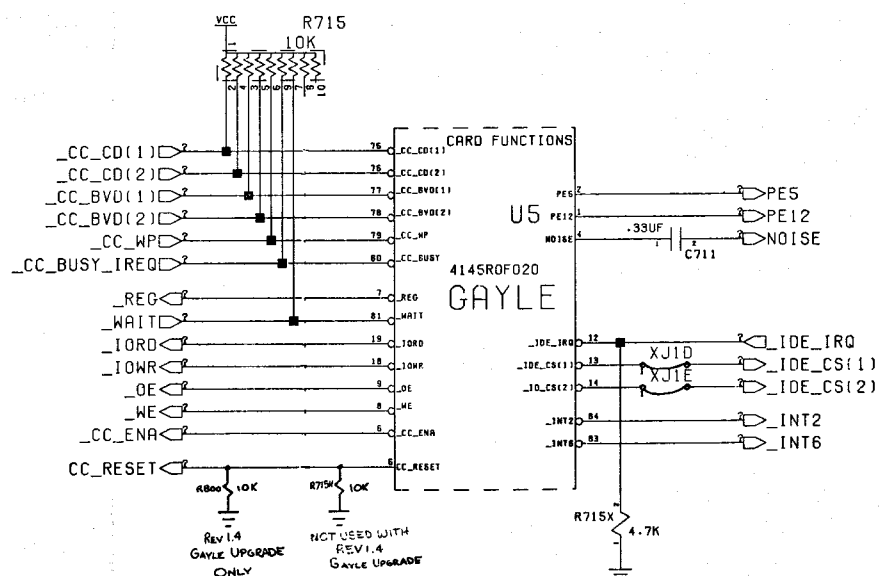

COUPLING


MEMORY EXPANS

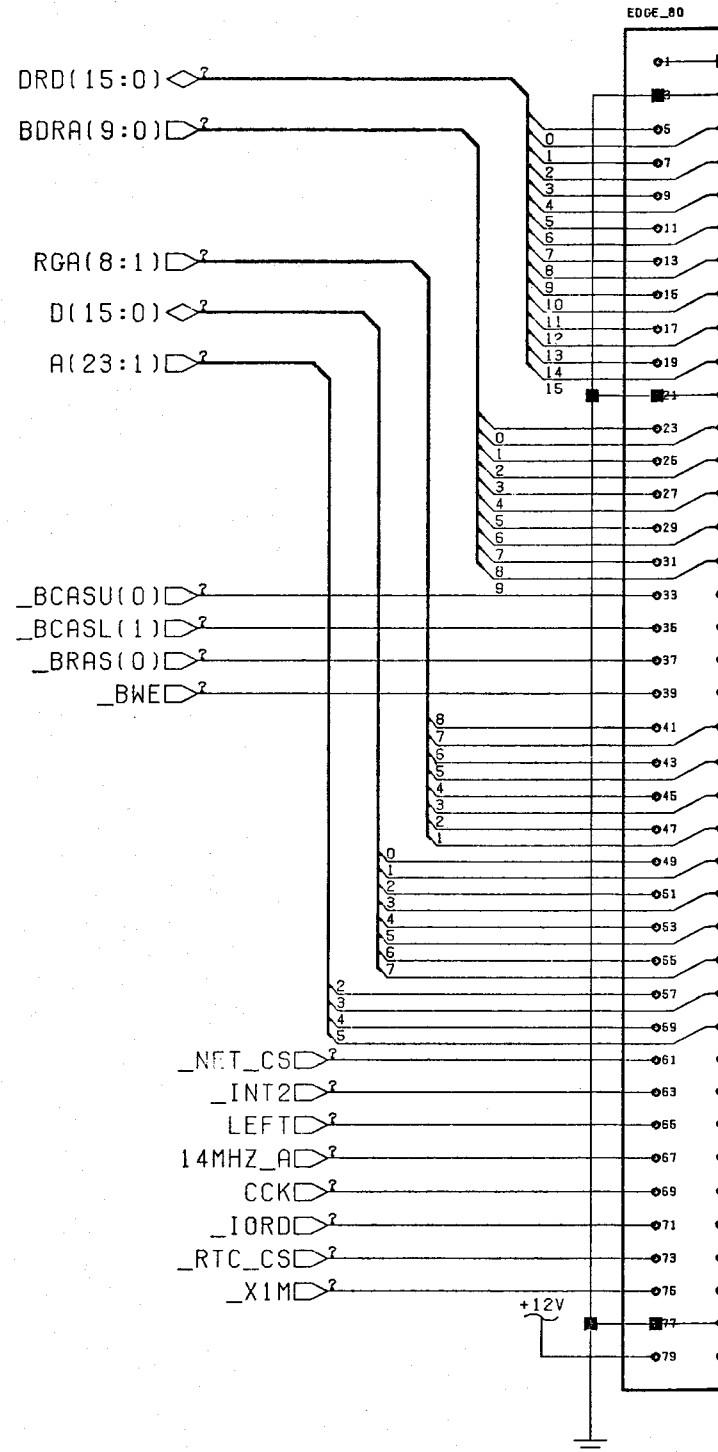

ANSION


IDE DRIVE

CN16

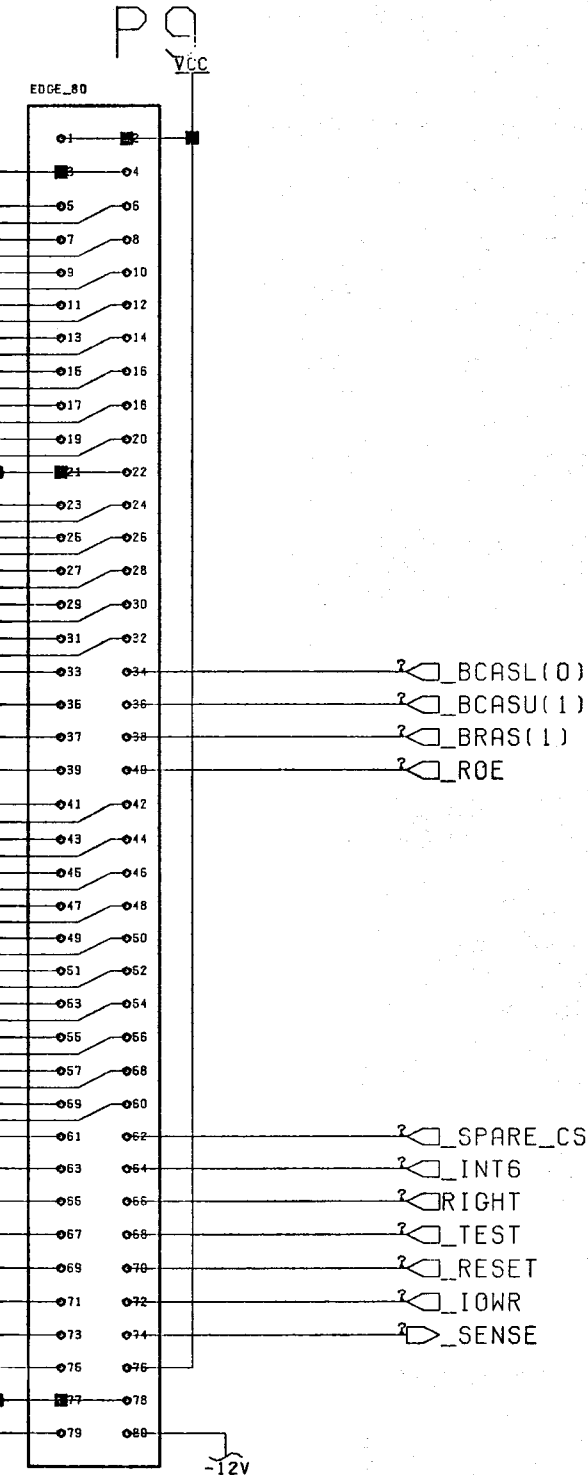


WARNING :

BYTE SWAPPED

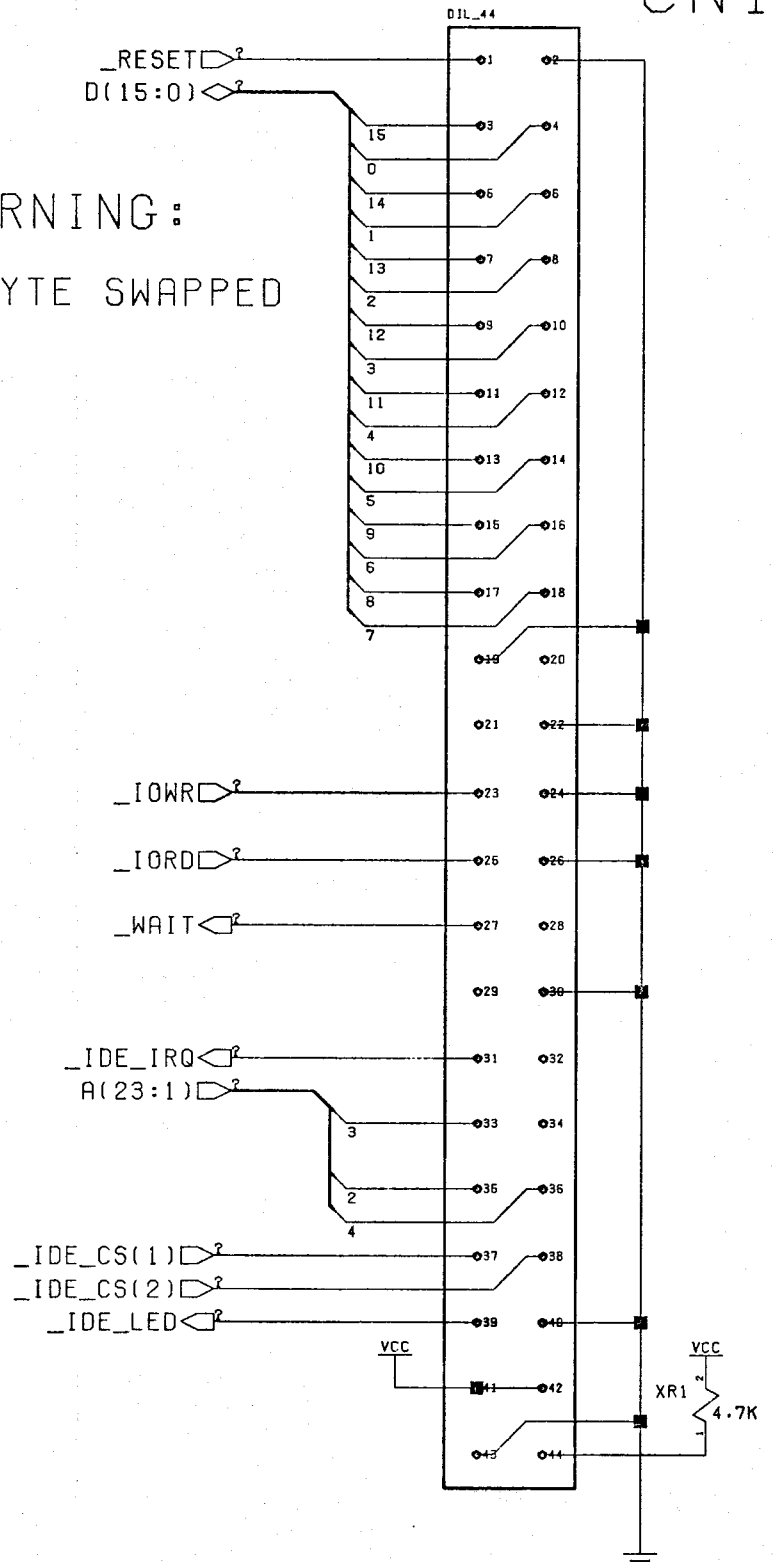


Schematic #315987, Rev. C
Sheet 13 of 13

POWER INPUT

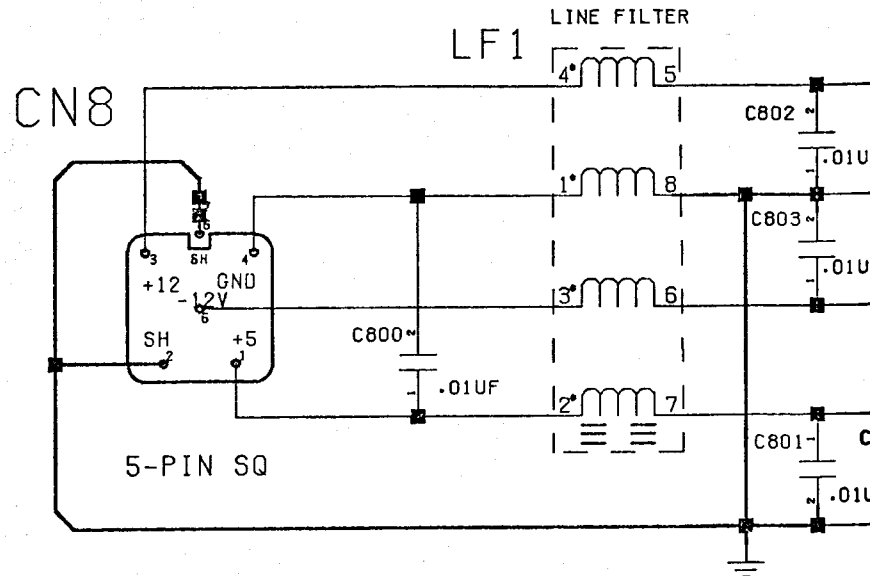


NOTE: HEAVY LINES INDICATE A SINGLE POINT CONNECTION

GROUNDING HOLES

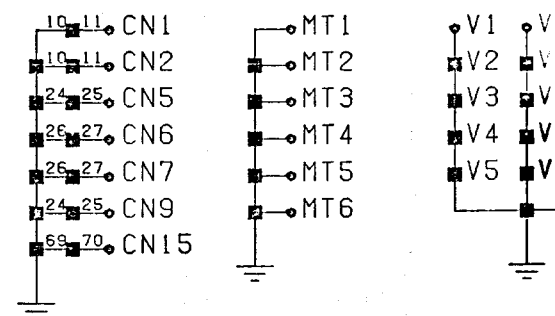


INPUT

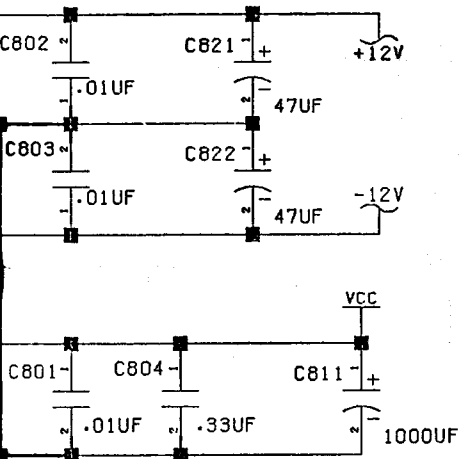

A
ION

ES, &C.



"BUS" TERMINATION

